3A LIGHTING

PRODUCT CATALOGUE 2019

NSW
3/48-50 Fitzpatrick Road
Revesby NSW 2212
Phone: 02 9724 7263
Fax: 02 9724 5656
Email: 3alighting@gmail.com

3A LIGHTING

COMPANY INTRODUCTION

3A AUSTRALIA LIGHTING is located in Sydney,Australia. Founded in 2004, we are alighting importer and wholesaler, bringing in a large variety of light fittings, suitable for both residential and commercial purposes.

Our main customers are retail lighting storesand electrical wholesalers. We are growing rapidly in a highly competitive industry. Ourproducts are sold throughout Australia.

Our product range covers LED lighting,downlights, flood lights, oyster lights, outdoor lights, close to ceiling lights,fluorescent lights and the range is still expanding. We are a young and energetic growing company with good work ethics.

CONTENTS

LED DOWNLIGHT SERIES AND LED SHOP FITTING SERIES	1-26
HIGH EFFCIENCY LED SERIES	27-34
LED STRIP LIGHT SERIES	35-38
SURFACE MOUNTED LIGHT SERIES	39-44
LED FLOOD LIGHT SERIES	45-50
LED HIGH BAY SERIES	51-54
LED CEILING LIGHT SERIES	55-66
LED BATTEN SERIES AND LED FLUORESCENT SERIES	67-76
LED PANEL LIGHT SERIES	77-82
LED SPOT LIGHT SERIES	83-88
LED OUTDOOR LIGHT SERIES	89-96
EXTERIOR LIGHT SERIES	97-118
LED SENSOR LIGHT SERIES	119-124
LED EMERGENCY LIGHT SERIES	125-130
ACCESSORIES SERIES	131-138
LED TRACK LIGHT SERIES	139-154

LED DOWNLIGHT SERIES AND LED SHOP FITTING SERIES

DL1270 DL1262
Page 1

DL1275 DL1362
Page 2

DL1280
Page 5

15W DL8695/TC DL8550
Page 7

DL9411-WH DL9411-BK
Page 8

DL9453-WH DL9453-BK
Page 9

13W DL9530
Page 10

DL1560 DL1250 -TC
DL1570 DL1260 -TC
Page 12

DL1187 DL1199
DL1198 WH TC
Page 13

DL1195 DL1197 /TC
DL2050 /TC DL3050 /TC
Page 14

DL1640 DL1650
Page 16

DL1755 WH DL1755 BK
Page 17

20W DL2005
30W DL3005
Page 18

18W DL2018D
20W DL2001D
30W DL3001D
Page 19

10W DL1061
10W DL1071/TC
13W DL 1349/TC
Page 20

DL 1360/13W TC
Page 21

6W MD01-06
MD02-10AC-L
Page 23

RS-001-S38W / TC
Page 24-25

CFS-001-S38W / TC
Page 26

HIGH EFFCIENCY LED SERIES

DI 106/10W/TC
DI 1019/15W/TC
DI 2009/20W/TC
Page 30

DI 3009/30W/TC
DI 4009/40W/TC
DI 5000/50W/TC
Page 31

DI 1066/10W/TC
DI 10196/15W/TC
DI 20096/20W/TC
DI 30096/30W/TC
Page 32

DI 1068/10W/TC
DI 10198/15W/TC
DI 20098/20W/TC
DI 30098/30W/TC
Page 33

DI 1069/10W/TC
DI 20099/20W/TCDI
30099/30W/TC
Page 34

LED STRIP LIGHT SERIES

50300
6A LED DRIVER
3A LED DRIVER
SMD5050
Page 37

LED 8W
LED MR16 8W
Page 38

SURFACE MOUNTED LIGHT SERIES

15W DL 2081
20W DL 2092
30W DL3082
Page 41

15W DL 2082 / TC
20W DL 2092 / TC
30W DL3082 / TC
Page 42

DL2034 BK
DL2034 WH
Page 43

LED FLOOD LIGHT SERIES

10W FL8910 20W FL8910
30W FL8910 50W FL8910
Page 47

100W FL02 200W FL02
Page 48

FL1030 /30W BK
FL1030/50W BK
Page 50

LED HIGH BAY SERIES

KD-006-S150W
KD-006-S200W
Page 53

OPT-UFO4-265-80W
OPT-UFO4-320-100W
OPT-UFO4-320-125W
OPT-UFO4-320-150W
Page 54

LED CEILING LIGHT SERIES

LED-15W AC1010
LED-18W AC1010
LED-30W AC1010
Page 57

LED-15W AC1011
LED-18W AC1011
Page 58

AC1011-LED-15W
AC1011-LED-18W
AC1011-LED-30W
Page 59

LED-15W AC1020
LED-20W AC1020
LED-30W AC1020
Page 60

AC9001-12W
AC9001-15W
AC9001-20W
AC9001-30W
Page 61

AC9001-15W
AC9001-20W
AC9001-30W
Page 62

LED-15W AC9002
LED-20W AC9002
LED-30W AC9002
Page 63

AC1001/WB AC1001/30
AC1001/40 AC1001/50
AC1002/30/WB
AC1002/30 AC1002/40
Page 64

AC1003/30/WB
AC1003/30 AC1003/40
AC1009/WB AC1009/40
AC1009/30
Page 65

AC1004/WB AC1004/30
AC1004/40
Page 66

LED BATTEN SERIES AND LED FLUORESCENT SERIES

25W LED-ARC
40W LED-ARC
Page 69

LB-18W LB-36W
LS-18W /TC LS-36W /TC
Page 70

LED/BT 20W TC
LED/BT 40W TC
Page 71

LED/DPB 118WP
LED/DPB 218WP
LED/DPB 136WP
LED/DPB 236WP
Page 72

SP210WPEM
SP218WPEM Sp 1001
Page 73

SP210PSEM SP220PSEM
SP210WGEM SP220WGEM
Page 74

LED-DPA110 LED-DPA120
LED-DPB110 LED-DPB120
Page 75

T8P10L06 T8P20L12
Page 76

LED PANEL LIGHT SERIES

LPA new /18W 600×300
LPA new /40W 600×600
LPB new/40W 1200×300
LPB new/40W 1200×300 Tc
Page 79

SB-OBPL2-1x4-25W
Page 80

OB-PD6060-V0
OB-PD1230-V0
Page 81

LED SPOT LIGHT SERIES

1024D 4+151D
1033A 4+151A
Page 85

1031D 1+151D 2+151D
3+151D 4+151D
Page 86

1031A 1+151A
Page 87

LED OUTDOOR LIGHT SERIES

2122 2133
Page 91

2131
Page 92

2124 2142
Page 93

2143 2144
Page 94

2324
Page 95

2360
Page 96

EXTERIOR LIGHT SERIES

812A 814A 812B 814B
811A 813A 811G 813G
Page 99

805F
Page 100

3222 3311 3121S
3121B 3121B
Page 101

5111
JD-CD75C02C
Page 102

146A+C EX 146B+C EX
146A+C DNEX UP OR DOWN
146C+C EX UP OR DOWN
Page 103

146B+C SEN
146C+C SEN
Page 104

257 257-2
256
Page 105

SA031 WX4011 WX4017
WX4018 WX4019
Page 106

WX4026 WX4028
WX4027
Page 107

ST712 ST714-450
ST714-1000
Page 108

ST5089 BLK
ST5089 TTM
Page 109

ST5161 BLK
ST5161 TTM
Page 110

ST5163 BLK
ST5163 TTM
Page 111

ST5090 BLK
ST5090 TTM
Page 113

ST5023 ST5025
Page 114


ST5021 ST5022
Page 115

ST5024 ST5025
Page 116

3W LF-372046R
3W LF-372046S
Page 117

4W LF-372033
6W LF-372033
Page 118

LED SENSOR LIGHT SERIES

ES-B06B
Page 121

AC4202
Page 122

AC 4206 AC 4205
AC 4203
Page 123

ST09 ST765 ST05C
ST41C
Page 124

LED EMERGENCY LIGHT SERIES

SP-2001-WH
SP-2001-BK
Page 127

SP-2002-WH
SP-2003-WH
Page 128

SP-3002
Page 129

SP-3001 SP-3001B
Page 130

ACCESSORIES SERIES

Page 133

VP EV4
Page 134

11W A60 5W MR16
Page 135

PAR20-7W PAR38-15W
Page 136

GU10LP PL02 PL03
3A DRIVER 6A DRIVER
Page 137


L-Feed-L L-Feed-R
T-Feed-L1 T- Feed-L2
T- Feed-R1
Page 138

LED TRACK LIGHT SERIES

TH15LED/BLK
TH15LED/WH
Page 142

GD-026-0637
Page 144

TH26LED-20W
TH26LED-25W
Page 146

TH 16-GU10
TH 17-12W
Page 147

BJ-TR60A-C
Page 148

MN-TR55M-C09W
MN-TR63M-C18W
MN-TR75M-C30W
Page 150

MN-DL55M-C09W
MN-DL63M-C18W
MN-DL75M-C30W
Page 151

MN-EX55M-C09W
MN-EX63M-C18W
MN-EX75M-C30W
Page 152

MN-SL55M-C09W
MN-SL63M-C18W
MN-SL75M-C30W
Page 153

LED DOWNLIGHT AND LED SHOP FITTING

SMD LED, a world leader in SMD LED technology.
Available in 70mm， 90mm hole cut out size.Matt white, Matt black, satin chrome and gold,stylish and modern to suit any home or business.Fully dimmable with branded leading and trailing edge dimmers.



P3
DL1270



P7
DL8695/TC



P8
DL9411

P13
DL1187



P24
RS-001-S38W / TC

DL1270

DL1262

DIMENSIONS

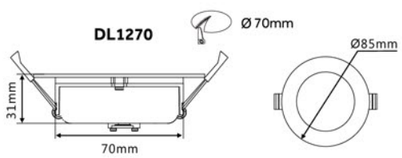

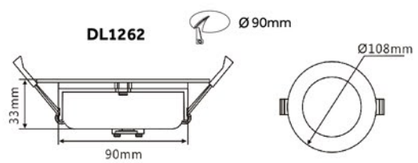

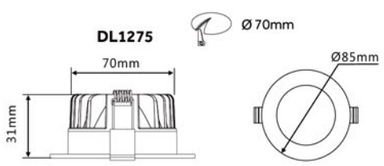

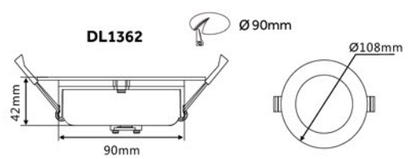

PRODUCT FEATURES

- New generation Samsung LED chip
- Dimmable range 3%-100%
- C-Bus2 compatible
- Replacing CFL and halogen downlight applications
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L115*W115*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

PHOTOMETRIC DATA

3000K



4000K

6000K



DL1275

DL1362

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1270 WH/WW	200-240V	10W	650lm	3000K	120°	>80	Yes	White	7.4Kg	10.2Kg
DL1270 WH/NW	200-240V	10W	700lm	4000K	120°	>80	Yes	White	7.4kg	10.2Kg
DL1270 WH/DL	200-240V	10W	750lm	6000K	120°	>80	Yes	White	7.4kg	10.2Kg
DL1270 SCH/WW	200-240V	10W	650lm	3000K	120°	>80	Yes	Santin Chrome	7.4kg	10.2Kg
DL1270 SCH/NW	200-240V	10W	700lm	4000K	120°	>80	Yes	Santin Chrome	7.4kg	10.2Kg
DL1270 SCH/DL	200-240V	10W	750lm	6000K	120°	>80	Yes	Santin Chrome	7.4kg	10.2Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1262 GD/WW	200-240V	12W	900lm	3000K	120°	>80	Yes	Golden	9.5Kg	12Kg
DL1262 GD/NW	200-240V	12W	950lm	4000K	120°	>80	Yes	Golden	9.5Kg	12Kg
DL1262 GD/DL	200-240V	12W	1000lm	6000K	120°	>80	Yes	Golden	9.5Kg	12Kg
DL1262 WH/WW	200-240V	12W	900lm	3000K	120°	>80	Yes	White	9.5Kg	12Kg
DL1262 WH/NW	200-240V	12W	950lm	4000K	120°	>80	Yes	White	9.5Kg	12Kg
DL1262 WH/DL	200-240V	12W	1000lm	6000K	120°	>80	Yes	White	9.5Kg	12Kg
DL1262 SCH/WW	200-240V	12W	900lm	3000K	120°	>80	Yes	Santin Chrome	9.5Kg	12Kg
DL1262 SCH/NW	200-240V	12W	950lm	4000K	120°	>80	Yes	Santin Chrome	9.5Kg	12Kg
DL1262 SCH/DL	200-240V	12W	1000lm	6000K	120°	>80	Yes	Santin Chrome	9.5Kg	12Kg
DL1262 BK/WW	200-240V	12W	900lm	3000K	120°	>80	Yes	Black	9.5Kg	12Kg
DL1262 BK/NW	200-240V	12W	950lm	4000K	120°	>80	Yes	Black	9.5Kg	12Kg
DL1262 BK/DL	200-240V	12W	1000lm	6000K	120°	>80	Yes	Black	9.5Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1275 WH/WW	200-240V	10W	700lm	3000K	120°	>80	Yes	White	7.4Kg	10.2Kg
DL1275 WH/NW	200-240V	10W	750lm	4000K	120°	>80	Yes	White	7.4kg	10.2Kg
DL1275 WH/DL	200-240V	10W	800lm	6000K	120°	>80	Yes	White	7.4kg	10.2Kg
DL1275 SCH/WW	200-240V	10W	700lm	3000K	120°	>80	Yes	Santin Chrome	7.4kg	10.2Kg
DL1275 SCH/DL	200-240V	10W	800lm	6000K	120°	>80	Yes	Santin Chrome	7.4kg	10.2Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1362 BK/WW	200-240V	13W	900lm	3000K	90°	>80	Yes	Black	9.5Kg	12Kg
DL1362 BK/NW	200-240V	13W	950lm	4000K	90°	>80	Yes	Black	9.5Kg	12Kg
DL1362 BK/DL	200-240V	13W	1000lm	6000K	90°	>80	Yes	Black	9.5Kg	12Kg
DL1362 WH/WW	200-240V	13W	900lm	3000K	90°	>80	Yes	White	9.5Kg	12Kg
DL1362 WH/NW	200-240V	13W	950lm	4000K	90°	>80	Yes	White	9.5Kg	12Kg
DL1362 WH/DL	200-240V	13W	1000lm	6000K	90°	>80	Yes	White	9.5Kg	12Kg
DL1362 SCH/WW	200-240V	13W	900lm	3000K	90°	>80	Yes	Santin Chrome	9.5Kg	12Kg
DL1362 SCH/NW	200-240V	13W	950lm	4000K	90°	>80	Yes	Santin Chrome	9.5Kg	12Kg
DL1362 SCH/DL	200-240V	13W	1000lm	6000K	90°	>80	Yes	Santin Chrome	9.5Kg	12Kg

LED DOWNLIGHT

PRODUCT FEATURES

- New SMD LED chip
- Dimmable range 3%-100%
- C-Bus2 compatible
- Replacing CFL and halogen downlight applications
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

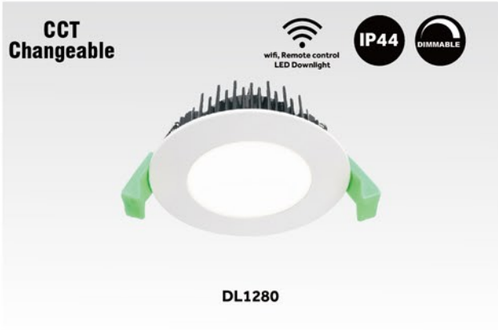

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L115*W115*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

DIMENSIONS

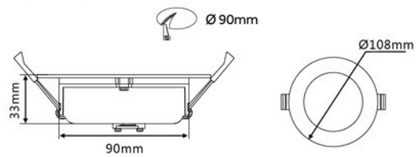

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1280 WH	200-240V	12W	800-900lm	3000K/4000K/6000K	120°	>80	Yes	White	9.5Kg	12Kg
DL1280 SCH	200-240V	12W	800-900lm	3000K/4000K/6000K	120°	>80	Yes	Santin Chrome	9.5Kg	12Kg

3000K 4000K 6000K

PHOTOMETRIC DATA

3000K



6000K



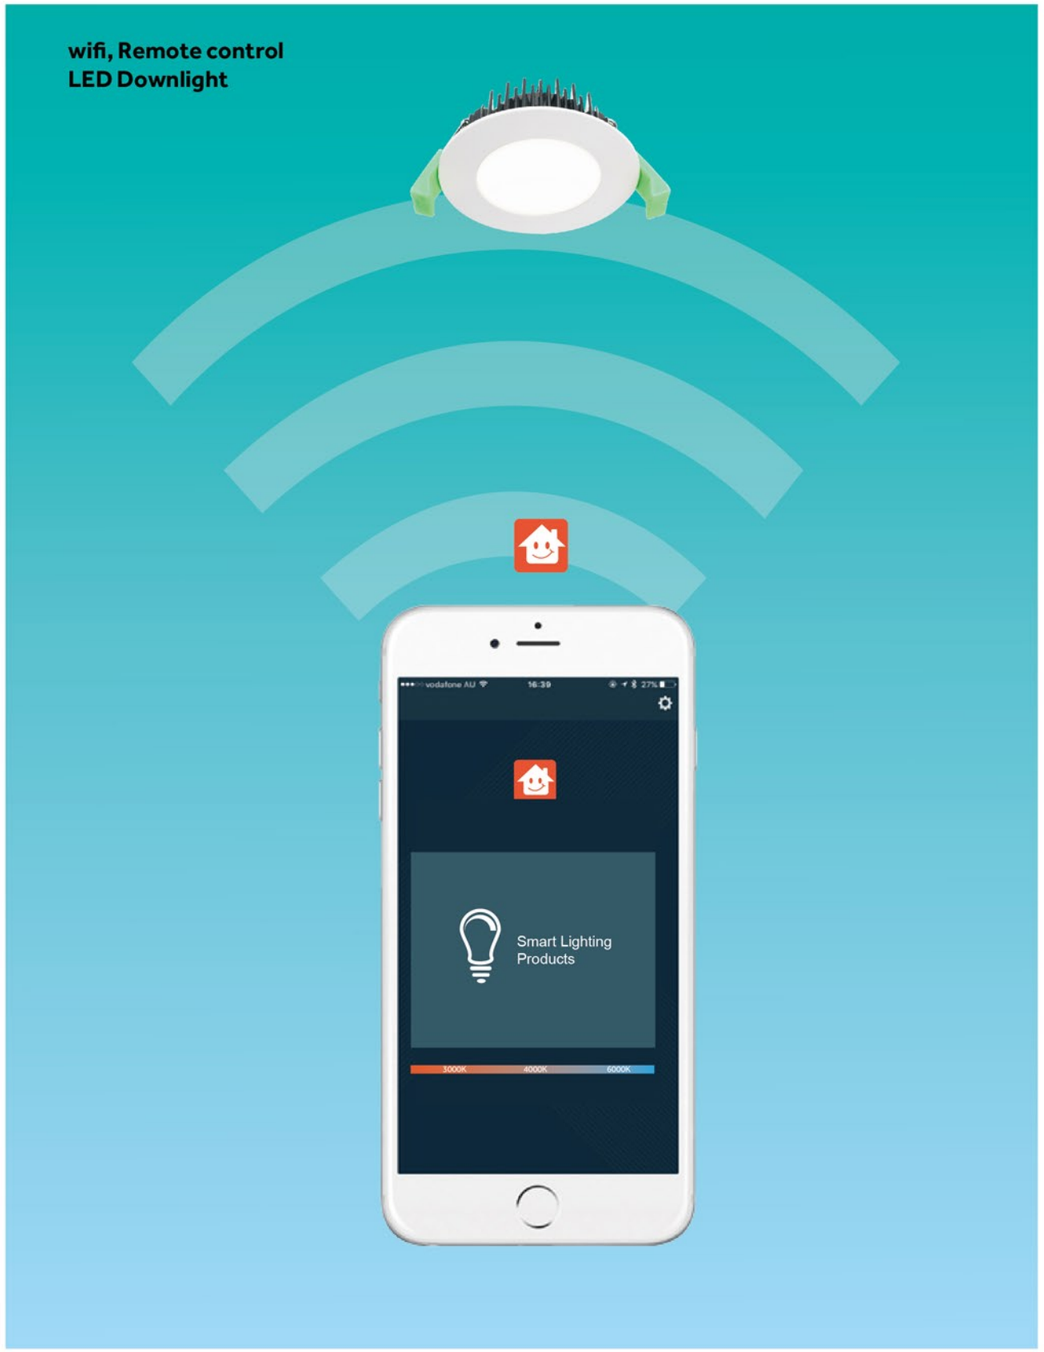

LED DOWNLIGHT

15W DL8695/TC

DL8550

DIMENSIONS





PRODUCT FEATURES

- New generation CREE SMD LED chip
- Dimmable range 3%-100%
- C-Bus2 compatible
- Replacing CFL and halogen downlight applications
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Dimmable with trailing edge and universal dimmer
- High colour rendering INDEX>80
- Easy installation
- Three year replacement warranty

PACKAGING (DL8695/TC)

- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

PACKAGING (DL8550)

- Packaging L138*W138*H90mm
- Carton 30pcs/CTN
- Carton Size L71*W43.5*H20.5cm

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL8695/WH/TC	200-240V	15W	1100lm	3000K/4000K/6000K	120°	>80	Yes	White	8.8Kg	12Kg
DL8695/SCH/TC	200-240V	15W	1100lm	3000K/4000K/6000K	120°	>80	Yes	Santin Chrome	8.8Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL8550 WH/WW	200-240V	13W	900lm	3000K	90°	>80	Yes	White	9.0Kg	12.4Kg
DL8550 WH/NW	200-240V	13W	950lm	4000K	90°	>80	Yes	White	9.0Kg	12.4Kg
DL8550 WH/DL	200-240V	13W	1000lm	6000K	90°	>80	Yes	White	9.0Kg	12.4Kg

PHOTOMETRIC DATA

3000K



6000K



DL9411-WH

DL9411-BK

DIMENSIONS



PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

MATERIAL

- Die-cat Aluminum

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L115*W115*H100mm
- Carton 50pcs/CTN
- Carton Size L59*W59*H22.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL9411-WH/WW	200-240V	10W	850lm	3000K	60°	>80	Yes	White	18.5Kg	21.5Kg
DL9411-WH/NW	200-240V	10W	850lm	4000K	60°	>80	Yes	White	18.5Kg	21.5Kg
DL9411-BK/WW	200-240V	10W	850lm	3000K	60°	>80	Yes	Black	18.5Kg	21.5Kg
DL9411-BK/NW	200-240V	10W	850lm	4000K	60°	>80	Yes	Black	18.5Kg	21.5Kg

LED DOWNLIGHT

DL9453-WH

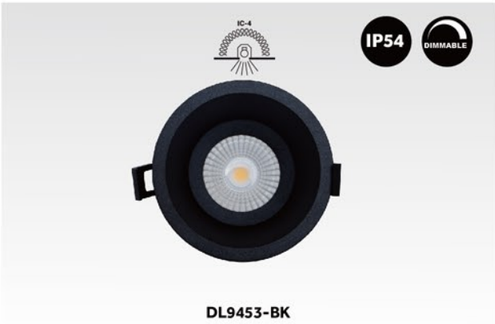

DL9453-BK

DIMENSIONS



PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

MATERIAL

- Die-cat Aluminum

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L115*W115*H100mm
- Carton 50pcs/CTN
- Carton Size L59*W59*H22.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL9453-WH/WW	200-240V	10W	850lm	3000K	60°	>90	Yes	White	17Kg	20.9Kg
DL9453-WH/NW	200-240V	10W	850lm	4000K	60°	>90	Yes	White	17Kg	20.9Kg
DL9453-BK/WW	200-240V	10W	850lm	3000K	60°	>90	Yes	Black	17Kg	20.9Kg
DL9453-BK/NW	200-240V	10W	850lm	4000K	60°	>90	Yes	Black	17Kg	20.9Kg

PRODUCT FEATURES

- Integrated design easy installation
- Dimmable range 3%-100%
- Built-in trailing edge dimmable LED driver
- Replacing CFL and halogen downlight applications
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Integrated design
- Easy installation
- Three year replacement warranty

13W DL9530

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L120*W120*H120mm
- Carton 36pcs/CTN
- Carton Size L57*W38*H38cm

DIMENSIONS

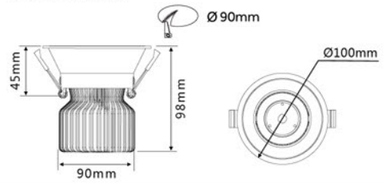

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL9530/WH/WW	200-240V	13W	971lm	3000K	60°	>80	Yes	White	14Kg	18Kg
DL9530/BK/WW	200-240V	13W	971lm	3000K	60°	>80	Yes	Black	14Kg	18Kg

PHOTOMETRIC DATA

GO1900L GONIOPHOTOMETER Test Report



Average ILLuminance Figure



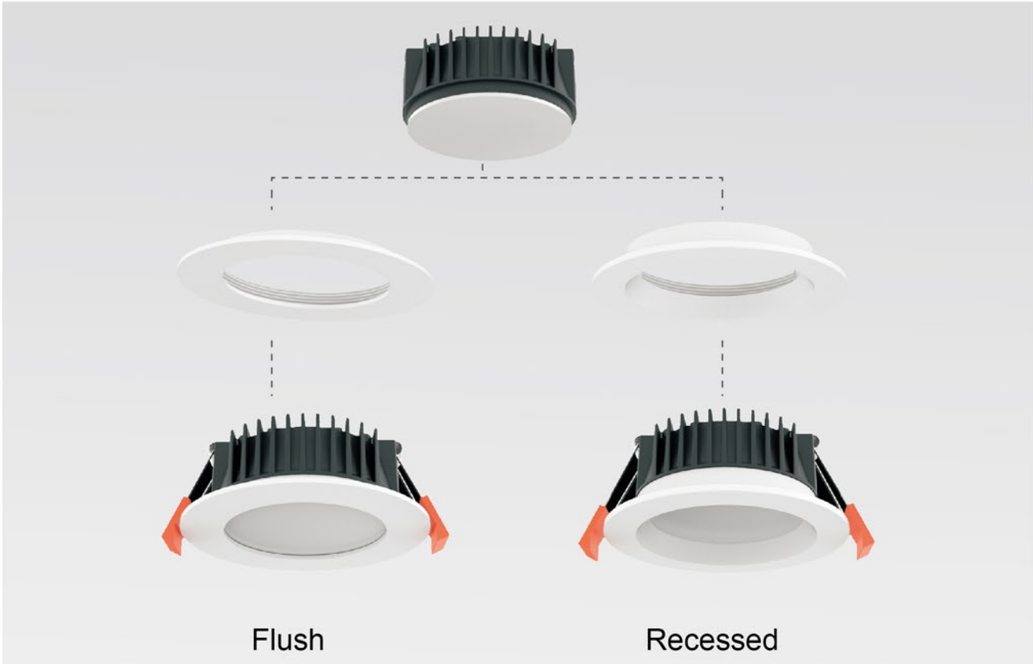

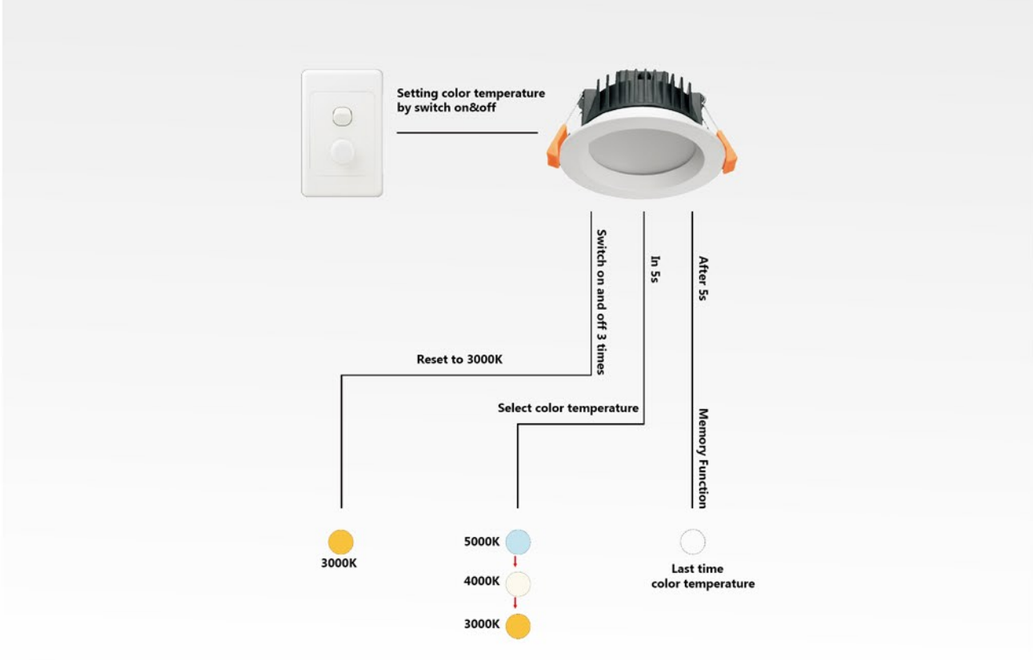

DIMENSIONS

(DL1560,DL1250 -TC)



(DL1570,DL1260 -TC)



PRODUCT FEATURES

- New generation SMD LED chip
- Dimmable range 3%-100%
- IC-4 recessed luminaire, lower fire hazard risk
- Pre-set tri-color-temperature switch for diverse needs
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Polycarbonate body
- Easy installation
- Three year replacement warranty
- No compatible with touch dimmer

PACKAGING(DL1560-TC,DL1250 -TC)

- Packaging L115*W115*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

PACKAGING(DL1570-TC,DL1260 -TC)

- Packaging L115*W115*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1560-TC WH	200-240V	13W	890-1080lm	3000K/4000K/5000K	120°	>80	Yes	White	9.2Kg	12Kg
DL1560-TC SCH	200-240V	13W	890-1080lm	3000K/4000K/5000K	120°	>80	Yes	Santin Chrome	9.2Kg	12Kg
DL1560-TC BK	200-240V	13W	890-1080lm	3000K/4000K/5000K	120°	>80	Yes	Black	9.2Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1250-TC WH	200-240V	13W	880-1050lm	3000K/4000K/5000K	120°	>80	Yes	White	9.2Kg	12Kg
DL1250-TC SCH	200-240V	13W	880-1050lm	3000K/4000K/5000K	120°	>80	Yes	Santin Chrome	9.2Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1570-TC BK	200-240V	13W	850-1060lm	3000K/4000K/5000K	90°	>80	Yes	Black	9.2Kg	12Kg
DL1570-TC SCH	200-240V	13W	850-1060lm	3000K/4000K/5000K	90°	>80	Yes	Santin Chrome	9.2Kg	12Kg
DL1570-TC WH	200-240V	13W	850-1060lm	3000K/4000K/5000K	90°	>80	Yes	White	9.2Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1260-TC WH	200-240V	13W	840-1000lm	3000K/4000K/5000K	90°	>80	Yes	White	9.2Kg	12Kg
DL1260-TC SCH	200-240V	13W	840-1000lm	3000K/4000K/5000K	90°	>80	Yes	Santin Chrome	9.2Kg	12Kg

PHOTOMETRIC DATA

3000K



4000K



5000K





DL1187 | DL1199/Non-dimmable | DL1198 WH TC

DIMENSIONS



PRODUCT FEATURES

- Intergrated design easy installation
- Replacing CFL and halogen downlight applications
- High efficiency LED chip and translucent diffuser
- Intergrated design
- Easy installation
- Three year replacement warranty

PACKAGING

- Packaging L115*W115*H85mm
- Carton 30pcs/CTN
- Carton Size L60*W24.5*H25.7cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1187 WH WW	200-240V	10W	750lm	3000K	110°	>80	Yes	White	6.0Kg	8.1Kg
DL1187 WH NW	200-240V	10W	900lm	4000K	110°	>80	Yes	White	6.0Kg	8.1Kg
DL1187 WH DL	200-240V	10W	850lm	5000K	110°	>80	Yes	White	6.0Kg	8.1Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1199 WH WW	200-240V	10W	750lm	3000K	110°	>80	No	White	6.0Kg	8.1Kg
DL1199 WH NW	200-240V	10W	900lm	4000K	110°	>80	No	White	6.0Kg	8.1Kg
DL1199 WH DL	200-240V	10W	850lm	5000K	110°	>80	No	White	6.0Kg	8.1Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1198 WH TC	200-240V	10W	900lm	3000K/4000K 5000K	110°	>80	Yes	White	6.0Kg	8.1Kg

PHOTOMETRIC DATA

3000K



4000K



5000K



DL1195 | DL1197 /TC | DL2050 /TC | DL3050 /TC

DIMENSIONS

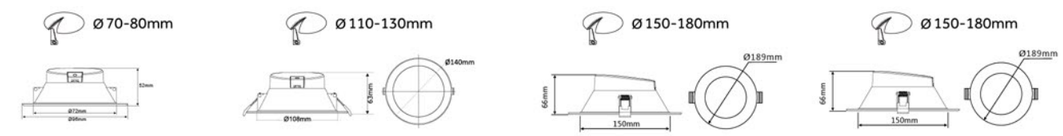

PACKAGING（DL1195）

- Packaging L115*W115*H70mm
- Carton 30pcs/CTN
- Carton Size L59.5*W25*H23.5cm

PACKAGING（DL1197/TC）

- Packaging L150*W150*H100mm
- Carton 30pcs/CTN
- Carton Size L47*W32*H52.5cm

PACKAGING（DL2050/TC）

- Packaging L210*W210*H90mm
- Carton 30pcs/CTN
- Carton Size L65*W43.5*H47cm

PACKAGING（DL3050/TC）

- Packaging L210*W210*H90mm
- Carton 30pcs/CTN
- Carton Size L65*W43.5*H47cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1195 WH/WW	200-240V	7W	600lm	3000K	100°	>80	Yes	White	4.8Kg	6.7Kg
DL1195 WH/NW	200-240V	7W	650lm	4000K	100°	>80	Yes	White	4.8Kg	6.7Kg
DL1195 WH/DL	200-240V	7W	700lm	5000K	100°	>80	Yes	White	4.8Kg	6.7Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1197/TC WH	200-240V	15W	1350lm	3000K/4000K 5000K	110°	>80	No	White	9.0Kg	12.6Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2050/TC	200-240V	20W	1500lm/1550lm 1600lm	3000K/4000K 5000K	110°	>80	Yes	White	12Kg	18Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL3050/TC	200-240V	30W	2300lm/2400lm 2450lm	3000K/4000K 5000K	110°	>80	Yes	White	12Kg	18Kg

PHOTOMETRIC DATA

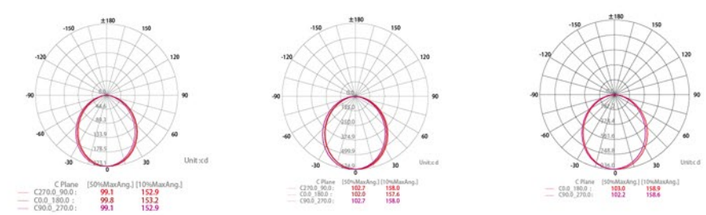

www.lightingengineers.com.au

NEW

DL1640 13W

Polyamide body with latest heat dissipation technology.

DL1650 13W

Polyamide body with latest heat dissipation technology.

DL1640

DL1650

DIMENSIONS



DL1640



DL1650

PRODUCT FEATURES

- New generation SMD LED chip
- Dimmable range 3%-100%
- IC-4 recessed luminaire, lower fire hazard risk
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Polycarbonate body
- Easy installation
- Three year replacement warranty

PACKAGING

- Packaging L115*W115*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1640 WH/WW	200-240V	13W	900lm	3000K	120°	>80	Yes	White	9.2Kg	12Kg
DL1640 WH/NW	200-240V	13W	920lm	4000K	120°	>80	Yes	White	9.2Kg	12Kg
DL1640 WH/DL	200-240V	13W	950lm	6000K	120°	>80	Yes	White	9.2Kg	12Kg
DL1640 SCH/WW	200-240V	13W	900lm	3000K	120°	>80	Yes	Santin Chrome	9.2Kg	12Kg
DL1640 SCH/NW	200-240V	13W	920lm	4000K	120°	>80	Yes	Santin Chrome	9.2Kg	12Kg
DL1640 SCH/DL	200-240V	13W	950lm	6000K	120°	>80	Yes	Santin Chrome	9.2Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1650 WH/WW	200-240V	13W	890lm	3000K	90°	>80	Yes	White	9.2Kg	12Kg
DL1650 WH/NW	200-240V	13W	910lm	4000K	90°	>80	Yes	White	9.2Kg	12Kg
DL1650 WH/DL	200-240V	13W	940lm	6000K	90°	>80	Yes	White	9.2Kg	12Kg
DL1650 SCH/WW	200-240V	13W	890lm	3000K	90°	>80	Yes	Santin Chrome	9.2Kg	12Kg
DL1650 SCH/NW	200-240V	13W	910lm	4000K	90°	>80	Yes	Santin Chrome	9.2Kg	12Kg
DL1650 SCH/DL	200-240V	13W	940lm	6000K	90°	>80	Yes	Santin Chrome	9.2Kg	12Kg

PHOTOMETRIC DATA

3000K



4000K



5000K



LED DOWNLIGHT

DL1755 WH

DL1755 BK

DIMENSIONS



PRODUCT FEATURES

- New COB LED chip
- Dimmable range 3%-100%
- C-Bus2 compatible
- Replacing CFL and halogen downlight applications
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

PACKAGING

- Packaging L115*W115*H105mm
- Carton 30pcs/CTN
- Carton Size L59.5*W36.5*H23.5cm

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1755 WH/WW	200-240V	13W	1000lm	3000K	90°	>80	Yes	White	9.2Kg	12Kg
DL1755 WH/DL	200-240V	13W	1100lm	5000K	90°	>80	Yes	White	9.2Kg	12Kg
DL1755 BK/WW	200-240V	13W	1000lm	3000K	90°	>80	Yes	Black	9.2Kg	12Kg
DL1755 BK/DL	200-240V	13W	1100lm	5000K	90°	>80	Yes	Black	9.2Kg	12Kg

PHOTOMETRIC DATA

3000K



5000K



20W DL2005

30W DL3005

DIMENSIONS





PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING (20W DL2005)

- Packaging L180*W180*H65mm
- Carton 20pcs/CTN
- Carton Size L37.5*W37.5*H35cm

PACKAGING (30W DL3005)

- Packaging L240*W240*H70mm
- Carton 20pcs/CTN
- Carton Size L72.5*W25.5*H50.5cm

MATERIAL

- Die-cat Aluminum

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2005 WH/WW	200-240V	20W	1700lm	3000K	100°	>80	Yes	White	9.6Kg	11.6Kg
DL2005 WH/NW	200-240V	20W	1700lm	4000K	100°	>80	Yes	White	9.6Kg	11.6Kg
DL2005 WH/DL	200-240V	20W	1700lm	5000K	100°	>80	Yes	White	9.6Kg	11.6Kg
DL2005 BK/WW	200-240V	20W	1700lm	3000K	100°	>80	Yes	Black	9.6Kg	11.6Kg
DL2005 BK/NW	200-240V	20W	1700lm	4000K	100°	>80	Yes	Black	9.6Kg	11.6Kg
DL2005 BK/DL	200-240V	20W	1700lm	5000K	100°	>80	Yes	Black	9.6Kg	11.6Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL3005 WH/WW	200-240V	30W	2520lm	3000K	100°	>80	Yes	White	18Kg	19Kg
DL3005 WH/NW	200-240V	30W	2520lm	4000K	100°	>80	Yes	White	18Kg	19Kg
DL3005 WH/DL	200-240V	30W	2520lm	5000K	100°	>80	Yes	White	18Kg	19Kg
DL3005 BK/WW	200-240V	30W	2520lm	3000K	100°	>80	Yes	Black	18Kg	19Kg
DL3005 BK/NW	200-240V	30W	2520lm	4000K	100°	>80	Yes	Black	18Kg	19Kg
DL3005 BK/DL	200-240V	30W	2520lm	5000K	100°	>80	Yes	Black	18Kg	19Kg

DIMENSIONS

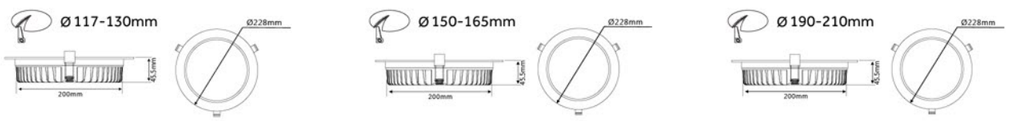

PRODUCT FEATURES

- New generation Samsung LED chip
- Dimmable range 3%-100%
- C-Bus2 compatible
- Replacing CFL and halogen downlight applications
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

PACKAGING (18W DL2018D)

- Packaging L150*W150*H100mm
- Carton 15pcs/CTN
- Carton Size L47*W17*H52.5cm

PACKAGING (20W DL2001D)

- Packaging L200*W90*H100mm
- Carton 15pcs/CTN
- Carton Size L59*W22*H52.5cm

PACKAGING (30W DL3001D)

- Packaging L245*W235*H100mm
- Carton 15pcs/CTN
- Carton Size L72.5*W26.5*H52.5cmv

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2018D WH/WW	200-240V	18W	1300lm	3000K	90°	>80	Yes	White	7.5Kg	10Kg
DL2018D WH/DL	200-240V	18W	1400lm	5000K	90°	>80	Yes	White	7.5Kg	10Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2001D WH/WW	200-240V	20W	1900lm	3000K	90°	>80	Yes	White	11Kg	14Kg
DL2001D WH/NW	200-240V	20W	1950lm	4000K	90°	>80	Yes	White	11Kg	14Kg
DL2001D WH/DL	200-240V	20W	2000lm	6000K	90°	>80	Yes	White	11Kg	14Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL3001D WH/WW	200-240V	30W	2900lm	3000K	90°	>80	Yes	White	14Kg	18Kg
DL3001D WH/NW	200-240V	30W	2950lm	4000K	90°	>80	Yes	White	14Kg	18Kg
DL3001D WH/DL	200-240V	30W	3030lm	6000K	90°	>80	Yes	White	14Kg	18Kg

PHOTOMETRIC DATA

3000K



6000K



DIMENSIONS

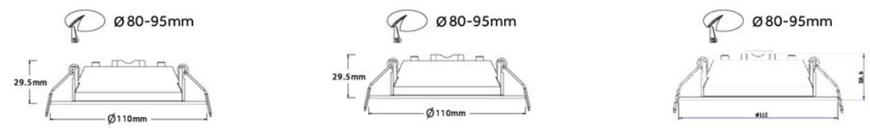

PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING (DL1061)

- Packaging L120*W120*H70mm
- Carton 50pcs/CTN
- Carton Size L62.5*W25.5*H37.5cm

PACKAGING (DL1071/TC)

- Packaging L120*W120*H70mm
- Carton 50pcs/CTN
- Carton Size L62.5*W25.5*H37.5cm

PACKAGING (DL 1349/TC)

- Packaging L120*W120*H70mm
- Carton 50pcs/CTN
- Carton Size L62.5*W25.5*H37.5cm

MATERIAL

- Die-cat Aluminum

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1061 WH-WW	200-240V	10W	700lm-800lm	3000K	100°	>80	Yes	White	11.1Kg	12.1Kg
DL1061 WH-NW	200-240V	10W	700lm-800lm	4000K	100°	>80	Yes	White	11.1Kg	12.1Kg
DL1061 WH-DL	200-240V	10W	700lm-800lm	5700K	100°	>80	Yes	White	11.1Kg	12.1Kg

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1071 / WH/TC	200-240V	10W	700lm-800lm	3000K/4000K 5700K	100°	>80	Yes	White	11.1Kg	12.1Kg

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL1349 / WH/TC	200-240V	13W	800lm-900lm	3000K/4000K 5700K	100°	>80	Yes	White	12.4Kg	13.4Kg

PHOTOMETRIC DATA

3000K



6000K



LED DOWNLIGHT

PRODUCT FEATURES

- 13W Square LED recessed downlight with anti-glare deep set frame
- Opal diffuser
- Dimmable LED Diver & flex and plug
- Fully dimmable with dimmer

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L140*W115*H90mm
- Carton 30pcs/CTN
- Carton Size L60*W30*H29cm

DL 1360/13W TC

SAA CE RoHS PF ≥0.9 -20°C To65°C NO UV/IR

DIMENSIONS

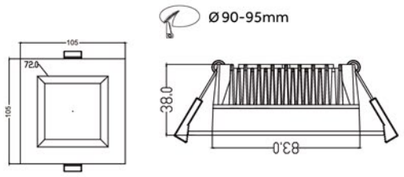

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour
DL 1360/13W TC	200-240V	13W	800-950lm	3000K/4000K/5000K/6000K	90°	>80/90	Yes	White t/ Black /Stainless steel

LED DOWNLIGHT MODULE

LED downlight input AC240V ,common products are 6W, 9W,13W,17W. Products are widely used in commercial lighting, indoor lighting.

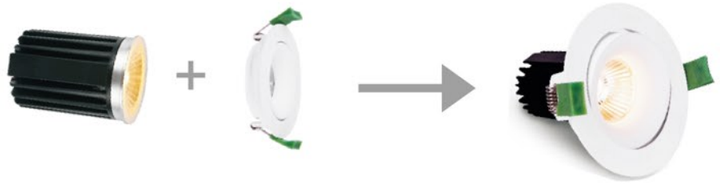

Module + Fittings → LED Retrofit Downlight

6W MD01-06

MD02-10AC-L

DIMENSIONS





PRODUCT FEATURES

- New generation CREE LED chip
- Dimmable range 3%-100%
- C-Bus2 compatible
- Replacing CFL and halogen downlight application
- Fitted with a flex and plug for ease of installation or retrofit.
- It can replace 50W halogens. Ultra-low energy consumption, high optical property, ultra-long lifespan.
- Original CREE COB LED chip with dimmable driver.
- 3 years replacement warranty.

PACKAGING(MD01-06)

- Packaging L130*W80*H110mm
- Carton 60pcs/CTN
- Carton Size L54*W41.5*H35cm

PACKAGING(MD02-10AC-L)

- Packaging L130*W80*H110mm
- Carton 60pcs/CTN
- Carton Size L54*W41.5*H35cm

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
MD01-06	200-240V	6W	390lm	3000K	60°	>80	Yes	Module	19.2Kg	19.8Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
MD02-10AC-L	200-240V	10W	710lm	3000K	60°	>80	Yes	Module	19.2Kg	19.8Kg

PHOTOMETRIC DATA









PRODUCT FEATURES

- New generation Samsung LED chip
- Replacing CFL and halogen downlight applications
- Wide frame design
- It can replace 75W metal halide lamp at maximum, possessing incomparable performance. Ultra-low energy consumption, high optical property, ultra-long lifespan.
- Original SAMSUNG chip with LIFUD driver.
- Tri-colour

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L253*W233*H178mm
- Carton 8pcs/Carton
- Carton Size L525*W485*H370mm

RS-001-S38W / TC

DIMENSIONS

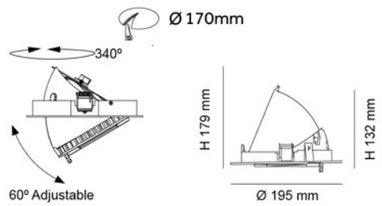

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
RS-001-S38W/TC	220 -240V	38W	3600lm	3000K/4000K 5700K	60°	>80	Yes	White	10Kg	14.7Kg

PHOTOMETRIC DATA

3000K



6000K





RS-001-S38W / TC

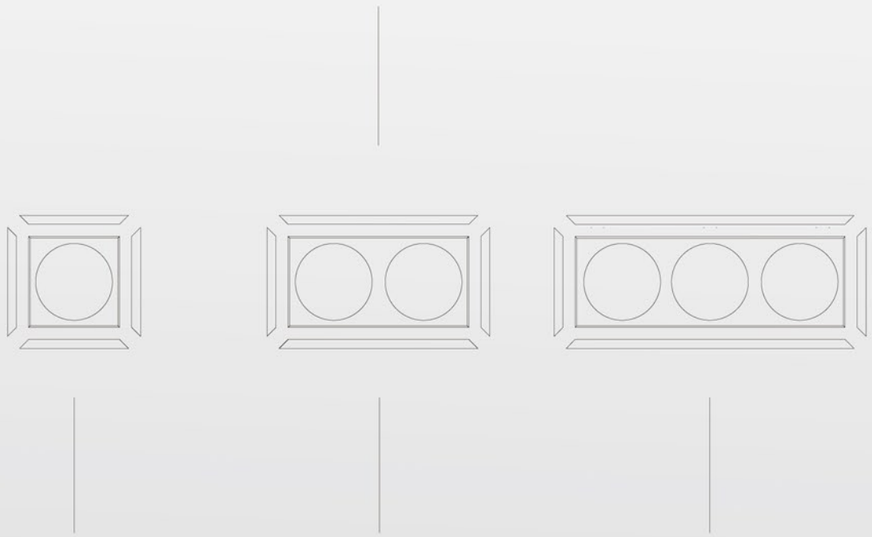

RS-DD01-S

Dimension: L200*W200*H154mm
Cut hole: 185*185mm

RS-DD02-S

Dimension: L365*W200*H154mm
Cut hole: 185*340mm

RS-DD03-S

Dimension: L530*W200*H154mm
Cut hole: 185*510mm

PRODUCT FEATURES

- New generation Samsung LED chip
- Replacing CFL and halogen downlight applications
- Wide frame design
- It can replace 75W metal halide lamp at maximum, possessing incomparable performance. Ultra-low energy consumption, high optical property, ultra-long lifespan.
- Original SAMSUNG chip with LIFUD driver.
- Tri-colour

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

PACKAGING

- Packaging L287*W185*H203mm
- Carton 8pcs/Carton
- Carton Size L590*W390*H430mm

PHOTOMETRIC DATA



CFS-001-S38W / TC

DIMENSIONS

cut hole:
L×W: 227x130mm



Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
CFS-001-S38W/TC	200-240V	38W	3600lm	3000K/4000K 5700K	120°	>85	Yes	White	12Kg	16.2Kg

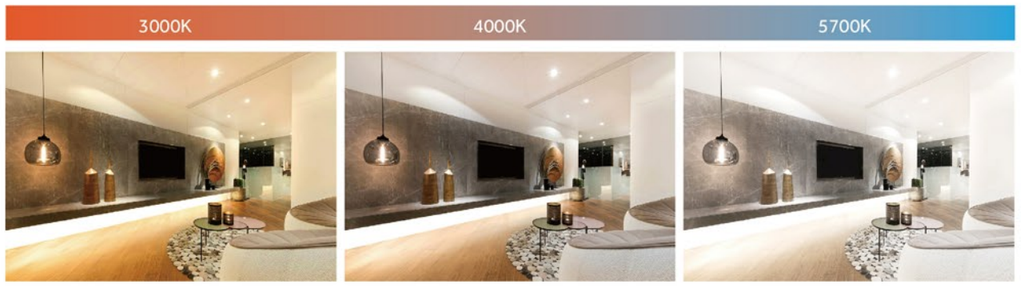

HIGH EFFCIENCY LED SERIES

Appearance:
Simple & thiness & integrated die casting design
Characteristics:
Tri-cct for changable & different size for optional & DIY
Application:
Home, hotel, office

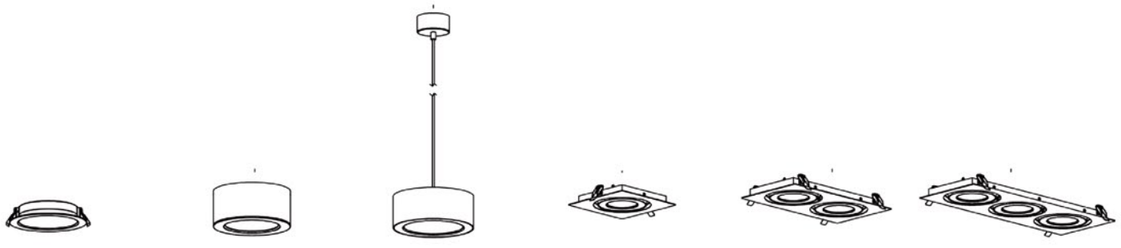

P30
DI 106

P32
DI 1066

P33
DI 1068

P34
DI 1069

P34
DI 20099

P34
DI 30099

New Tri-cct downlight-High Lumin

DIY family series

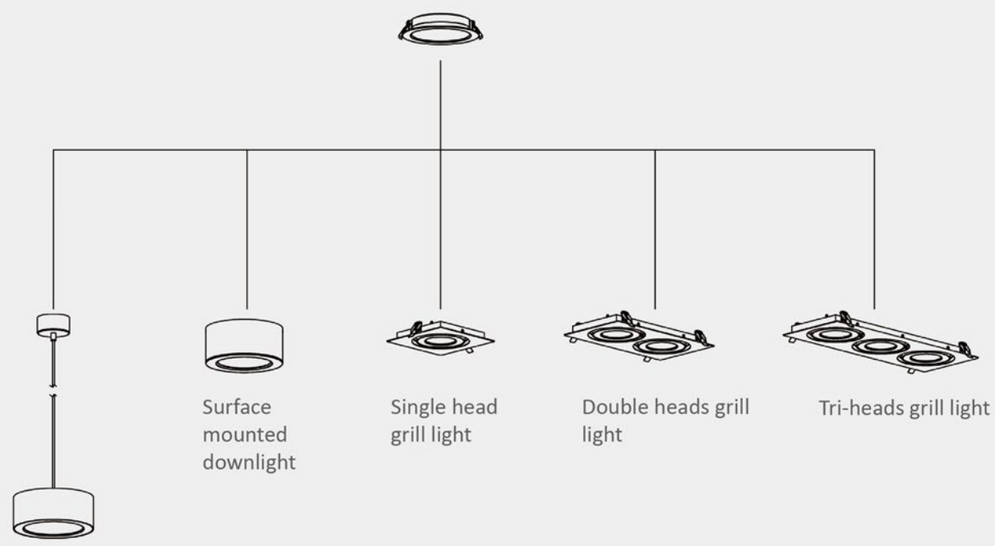

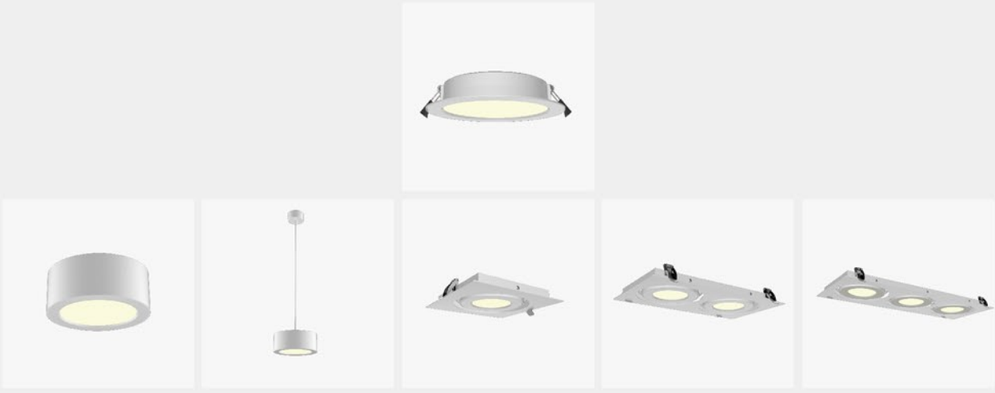

DIMENSIONS

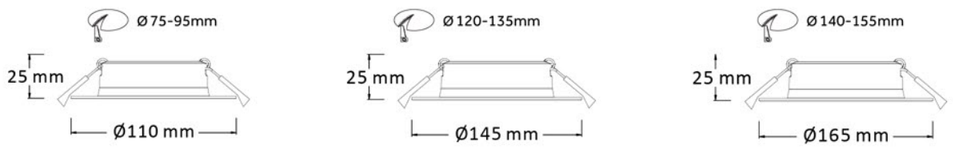

PRODUCT FEATURES

- Applications: Home,Shop,Hotel,Restaurant,Office
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty
- Tri-colour

PACKAGING (DI 106/10W/TC)

- Packaging L130×W120×H60mm
- Carton 48pcs/CTN
- Carton Size L37.5*W27.5*H50.5cm

PACKAGING (DI 1019/15W/TC)

- Packaging L160×W160×H60mm
- Carton 36pcs/CTN
- Carton Size L49.5*W33.5*H38.5cm

PACKAGING (DI 2009/20W/TC)

- Packaging L180×W180×H60mm
- Carton 28pcs/CTN
- Carton Size L37.5*W37.5*H44.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 106/10W/TC	220 -240V	10W	1200lm	3000K/4000K/5700K	100°	>80	Yes	White	10.6Kg	13.8Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 1019/15W/TC	220 -240V	15W	1800lm	3000K/4000K/5700K	100°	>80	Yes	White	11.4Kg	14.8Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 2009/20W/TC	220 -240V	20W	2400lm	3000K/4000K/5700K	100°	>80	Yes	White	12.5Kg	15.5Kg

CCT Changeable switch



DI 3009/30W/TC | DI 4009/40W/TC | DI 5000/50W/TC

DIMENSIONS

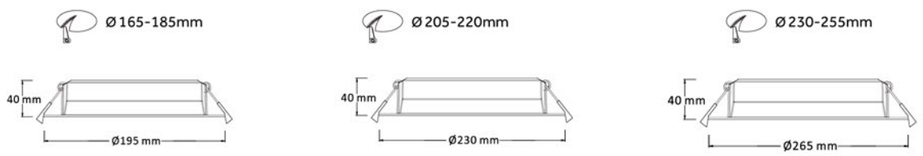

PRODUCT FEATURES

- Applications: Home,Shop,Hotel,Restaurant,Office
- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty
- Tri-colour

PACKAGING (DI 3009/30W/TC)

- Packaging L250×W215×H50mm
- Carton 24pcs/CTN
- Carton Size L59.5*W52.5*H32.5cm

PACKAGING (DI 4009/40W/TC)

- Packaging L290×W255×H50mm
- Carton 24pcs/CTN
- Carton Size L59.5*W52.5*H32.5cm

PACKAGING (DI 5000/50W/TC)

- Packaging L335×W300×H50mm
- Carton 20pcs/CTN
- Carton Size L68.5*W51.5*H32.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 3009/30W/TC	220 -240V	30W	3300lm	3000K/4000K/5700K	100°	>80	Yes	White	15.4Kg	17.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 4009/40W/TC	220 -240V	40W	4800lm	3000K/4000K/5700K	100°	>80	Yes	White	18.7Kg	23.7Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 5000/50W/TC	220 -240V	50W	6000lm	3000K/4000K/5700K	100°	>80	Yes	White	19.5Kg	24.5Kg

PROUCT INSTALLATION

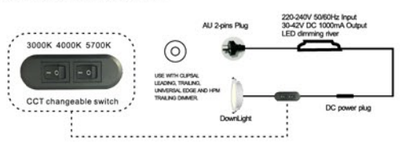

DI 1066/10W/TC | DI 10196/15W/TC | DI 20096/20W/TC | DI 30096/30W/TC

DIMENSIONS

PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty
- Tri-colour

PACKAGING (DI 1066/10W/TC)

- Packaging L130×W130×H95mm
- Carton 24pcs/CTN
- Carton Size L42*W28.5*H40.5cm

PACKAGING (DI 10196/15W/TC)

- Packaging L170×W170×H95mm
- Carton 20pcs/CTN
- Carton Size L35.5*W35.5*H50cm

PACKAGING (DI 20096/20W/TC)

- Packaging L190×W190×H95mm
- Carton 16pcs/CTN
- Carton Size L39.5*W39.5*H40.5cm

PACKAGING (DI 30096/30W/TC)

- Packaging L220×W220×H105mm
- Carton 12pcs/CTN
- Carton Size L45.5*W45.5*H34cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 1066/10W/TC	220 -240V	10W	1200lm	3000K/4000K/5700K	100°	>80	Yes	White	11.6Kg	14.8Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 10196/15W/TC	220 -240V	15W	1800lm	3000K/4000K/5700K	100°	>80	Yes	White	12.4Kg	15.8Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 20096/20W/TC	220 -240V	20W	2400lm	3000K/4000K/5700K	100°	>80	Yes	White	14.5Kg	17.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 30096/30W/TC	220 -240V	30W	3300lm	3000K/4000K/5700K	100°	>80	Yes	White	16.4Kg	18.5Kg

PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty
- Tri-colour

DIMENSIONS

DI 1068/10W/TC



DI 10198/15W/TC

DI 20098/20W/TC

DI 30098/30W/TC



PACKAGING (DI 1068/10W/TC)

- Packaging L130×W130×H150mm
- Carton 18pcs/CTN
- Carton Size L41*W27.5*H47.5cm

PACKAGING (DI 10198/15W/TC)

- Packaging L170×W170×H150mm
- Carton 12pcs/CTN
- Carton Size L35.5*W35.5*H47.5cm

PACKAGING (DI 20098/20W/TC)

- Packaging L190×W190×H1500mm
- Carton 12pcs/CTN
- Carton Size L39.5*W39.5*H47.5cm

PACKAGING (DI 30098/30W/TC)

- Packaging L220×W220×H160mm
- Carton 8pcs/CTN
- Carton Size L45.5*W45.5*H34.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 1068/10W/TC	220 -240V	10W	1200lm	3000K/4000K/5700K	100°	>80	Yes	White	11.8Kg	14.9Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 10198/15W/TC	220 -240V	15W	1800lm	3000K/4000K/5700K	100°	>80	Yes	White	12.6Kg	15.9Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 20098/20W/TC	220 -240V	20W	2400lm	3000K/4000K/5700K	100°	>80	Yes	White	14.7Kg	17.6Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 30098/30W/TC	220 -240V	30W	3300lm	3000K/4000K/5700K	100°	>80	Yes	White	16.6Kg	18.7Kg

PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Anodised aluminum heat sink
- Easy installation
- Three year replacement warranty
- Tri-colour

DIMENSIONS

DI 1069/10W/TC

DI 20099/20W/TC



DI 30099/30W/TC

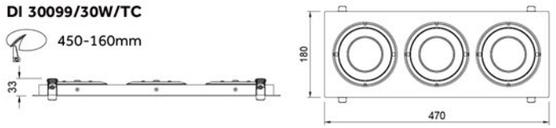

DI 1069/10W/TC

DI 20099/20W/TC

DI 30099/30W/TC

PACKAGING (DI 1069/10W/TC)

- Packaging L232×W205×H55mm
- Carton 20pcs/CTN
- Carton Size L48*W42.5*H30cm

PACKAGING (DI 20099/20W/TC)

- Packaging L352×W215×H60mm
- Carton 10pcs/CTN
- Carton Size L44.5*W36.5*H32.5cm

PACKAGING (DI 4009/40W/TC)

- Packaging L502×W215×H60mm
- Carton 6pcs/CTN
- Carton Size L51.5*W23*H38.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 1069/10W/TC	220 -240V	10W	1200lm	3000K/4000K/5700K	100°	>80	Yes	White	15.8Kg	18.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 20099/20W/TC	220 -240V	20W	2400lm	3000K/4000K/5700K	100°	>80	Yes	White	17.5Kg	19.8Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DI 30099/30W/TC	220 -240V	30W	3300lm	3000K/4000K/5700K	100°	>80	Yes	White	18.6Kg	20.6Kg

LED STRIP LIGHT

P38
LED 8W

P38
LED MR16 8W

LED STRIP LIGHT



50,000 hours

Model	50300WW/1M (14.4W/M) 50300DL/1M (14.4W/M) 5050WW/1M (7.2W/M) 5050DL/1M (7.2W/M) 6A LED DRIVER 3A LED DRIVER

Size	5M Per Roll
Power	14.4W/M or 7.2W/M
LED Color	3000K / 5000K
LED QTY	150pcs or 300pcs
LED Power	0.24W PER LED
Life	50,000 hours
Driver	12V 36VA&72VA MAX
IP Rated	IP64

SMD5050 SERIES

Widely choice

For the white color,3 grades of led chips are optional: 16-18lm/ CRI>80, 22-24lm/ CRI>80, 18-20lm/ CRI>90.
For RGB LEDs, 1500-2000mcd and 2000-2500mcd are optional.

RGBw Strip Series

The RGBW strips could provide high quality white and RGB full changing light, free to change the atmosphere of space. 1pcs LED includes red, green, blue and white chip, and single RGBW chip has better mix-lighting effect.

Model	Input Voltage	FLUX	Power	IP Grade	CCT	LED quantity	CRI	PCB Width	Length
SMD5050-30	DC12V DC24V	415lm/m	5.76W/M 6.9W/M	IP20/IP65 /IP66/IP67 /IP68	2200K -6500K	30pcs	>80 >90	10mm	5M/roll
SMD5050-60	DC12V DC24V	805lm/m	11.52W/M	IP20/IP65 /IP66/IP67 /IP68	2200K -6500K	60pcs	>80 >90	10mm	5M/roll
SMD5050-30	DC12V DC24V	NA	5.76W/M 6.9W/M	IP20/IP65 /IP66/IP67 /IP68	RGB	30pcs	1500-2000mcd	10mm	5M/roll
SMD5050-60	DC12V DC24V	NA	11.52W/M	IP20/IP65 /IP66/IP67 /IP68	RGB	60pcs	1500-2000mcd	10mm	5M/roll

Model	Input Voltage	FLUX	Power	IP Grade	CCT	LED quantity	CRI	PCB Width	Length
SMD5050-60	DC12V DC24V	NA	11.52W/M 13.8W/M	IP20/IP65 /IP66/IP67 /IP68	RGB, 2200K-6500K	60pcs	>80 >90	10mm	5M/roll
SMD5050-60	DC12V DC24V	NA	17.2W/M	IP20/IP65	RGB, 2200K-6500K	60pcs	>80	12mm	5M/roll
SMD5050-60	DC12V DC24V	NA	17.2W/M	IP20/IP65	RGB, 2200K-6500K	60pcs	>80	10mm	5M/roll

PACKAGING

- Packaging L210*W210*H90mm
- Carton 30pcs/CTN
- Carton Size L65*W43.5*H47cm

DIMENSIONS

LED 8W

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable
LED 8W	200-240V	8W	600lm	3000K/5500K	60°	>80	No

PRODUCT FEATURES

- Please turn off the power when installing.
- Do not touch or grasp the light if hot.
- Working environment temperature:-20°~45°C
- Only for indoor application
- Light Source: EPISTAR COB
- With latest LED technology-high lumen COB LED
- MR16 base, normal size.
- AC/DC12V, 50Hz, 9W.
- Average life up to 50,000 hours.
- Warranty: 2 years.

DIMENSIONS

LED MR16 8W

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Power Factor	Dimmable	Fitting Colour
MR16 WH/WW	200-240V	8W	540lm	3000K	120°	>80	>0.5	No	white
MR16 WH/DL	200-240V	8W	540lm	6000K	120°	>80	>0.5	No	white

SURFACE MOUNTED LIGHT SERIES



P41
DL 2081



P43
DL2034

IP54 DIMMABLE

15W DL 2081 | 20W DL 2092 | 30W DL3082

DIMENSIONS

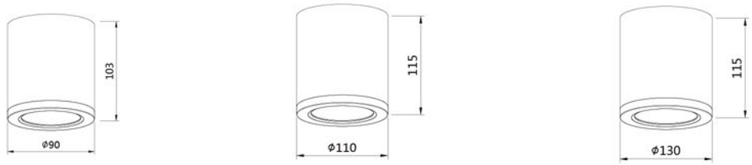

PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Polycarbonate body
- Easy installation
- Three year replacement warranty

PACKAGING (15W DL 2081)

- Packaging L110*W110*H123mm
- Carton 32pcs/CTN
- Carton Size L45.5*W45.5*H27.1cm

PACKAGING (20W DL 2092)

- Packaging L135*W135*H145mm
- Carton 24pcs/CTN
- Carton Size L55.5*W42*H31.5cm

PACKAGING (30W DL3082)

- Packaging L155*W155*H145mm
- Carton 18pcs/CTN
- Carton Size L48*W48*H31.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL 2081/WH/WW	220 -240V	15W	1300lm	3000K	60°	>80	Yes	White	13.7Kg	16.6Kg
DL 2081/WH/NW	220 -240V	15W	1350lm	4000K	60°	>80	Yes	White	13.7Kg	16.6Kg
DL 2081/WH/CW	220 -240V	15W	1320lm	5000K	60°	>80	Yes	White	13.7Kg	16.6Kg
DL 2081/BK/WW	220 -240V	15W	1300lm	3000K	60°	>80	Yes	Black	13.7Kg	16.6Kg
DL 2081/BK/NW	220 -240V	15W	1350lm	4000K	60°	>80	Yes	Black	13.7Kg	16.6Kg
DL 2081/BK/CW	220 -240V	15W	1320lm	5000K	60°	>80	Yes	Black	13.7Kg	16.6Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2092/WH/WW	220 -240V	20W	1700lm	3000K	60°	>80	Yes	White	15.8Kg	17.5Kg
DL2092/WH/NW	220 -240V	20W	1800lm	4000K	60°	>80	Yes	White	15.8Kg	17.5Kg
DL2092/WH/CW	220 -240V	20W	1750lm	5000K	60°	>80	Yes	White	15.8Kg	17.5Kg
DL2092/BK/WW	220 -240V	20W	1700lm	3000K	60°	>80	Yes	Black	15.8Kg	17.5Kg
DL2092/BK/NW	220 -240V	20W	1800lm	4000K	60°	>80	Yes	Black	15.8Kg	17.5Kg
DL2092/BK/CW	220 -240V	20W	1750lm	5000K	60°	>80	Yes	Black	15.8Kg	17.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL3082/WH/WW	220 -240V	30W	2550lm	3000K	60°	>80	Yes	White	17.6Kg	19.5Kg
DL3082/WH/NW	220 -240V	30W	2700lm	4000K	60°	>80	Yes	White	17.6Kg	19.5Kg
DL3082/WH/CW	220 -240V	30W	2650lm	5000K	60°	>80	Yes	White	17.6Kg	19.5Kg
DL3082/BK/WW	220 -240V	30W	2550lm	3000K	60°	>80	Yes	Black	17.6Kg	19.5Kg
DL3082/BK/NW	220 -240V	30W	2700lm	4000K	60°	>80	Yes	Black	17.6Kg	19.5Kg
DL3082/BK/CW	220 -240V	30W	2650lm	5000K	60°	>80	Yes	Black	17.6Kg	19.5Kg

WW TC DL CW IP54 DIMMABLE

15W DL 2082 / TC | 20W DL 2092 / TC | 30W DL3082 / TC

DIMENSIONS

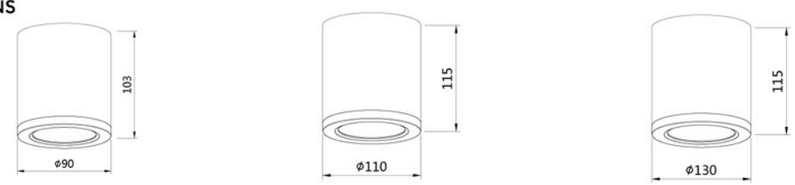

PRODUCT FEATURES

- Dimmable with trailing edge and universal dimmer
- High efficiency LED chip and translucent diffuser
- Polycarbonate body
- Easy installation
- Three year replacement warranty
- Tri-colour

PACKAGING (15W DL 2082 / TC)

- Packaging L110*W110*H123mm
- Carton 32pcs/CTN
- Carton Size L45.5*W45.5*H27.1cm

PACKAGING (20W DL 2092 / TC)

- Packaging L135*W135*H145mm
- Carton 24pcs/CTN
- Carton Size L55.5*W42*H31.5cm

PACKAGING (30W DL3082 / TC)

- Packaging L155*W155*H145mm
- Carton 18pcs/CTN
- Carton Size L48*W48*H31.5cm

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL 2082/WH/TC	220 -240V	15W	1350lm	3000K/4000K/5700K	60°	>80	Yes	White	13.8Kg	16.7Kg
DL 2082/BK/TC	220 -240V	15W	1350lm	3000K/4000K/5700K	60°	>80	Yes	Black	13.8Kg	16.7Kg

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2092/WH/TC	220 -240V	20W	1350lm	3000K/4000K/5700K	60°	>80	Yes	White	15.8Kg	17.5Kg
DL2092/BK/TC	220 -240V	20W	1350lm	3000K/4000K/5700K	60°	>80	Yes	Black	15.8Kg	17.5Kg

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL3082/WH/TC	220 -240V	30W	1350lm	3000K/4000K/5000K	60°	>80	Yes	White	17.6Kg	19.5Kg
DL3082/BK/TC	220 -240V	30W	1350lm	3000K/4000K/5000K	60°	>80	Yes	Black	17.6Kg	19.5Kg

DIMENSIONS



DL2034 BK

DL2034 WH

MATERIAL
- Die-cat Aluminum

PACKAGING
- Packaging L65*W65*H140mm
- Carton 30pcs/CTN
- Carton Size L35*W30.5*H22cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2034 BK/WW	220 -240V	12W	1100lm	3000K	36°	>80	No	Black	14Kg	16Kg
DL2034 BK/NW	220 -240V	12W	1100lm	4000K	36°	>80	No	Black	14Kg	16Kg
DL2034 BK/CW	220 -240V	12W	1100lm	6500K	36°	>80	No	Black	14Kg	16Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
DL2034 WH/WW	220 -240V	12W	1100lm	3000K	36°	>80	No	White	14Kg	16Kg
DL2034 WH/NW	220 -240V	12W	1100lm	4000K	36°	>80	No	White	14Kg	16Kg
DL2034 WH/CW	220 -240V	12W	1100lm	6500K	36°	>80	No	White	14Kg	16Kg

LED FLOOD LIGHT SERIES

General area lighting,security lighting,facades, roadway,pathway,sidewalk, parks and gardens.



P47
FL8910

P48
FL02

LED FLOOD LIGHT SERIES

IP65

10W FL8910 | 20W FL8910 | 30W FL8910 | 50W FL8910

DIMENSIONS

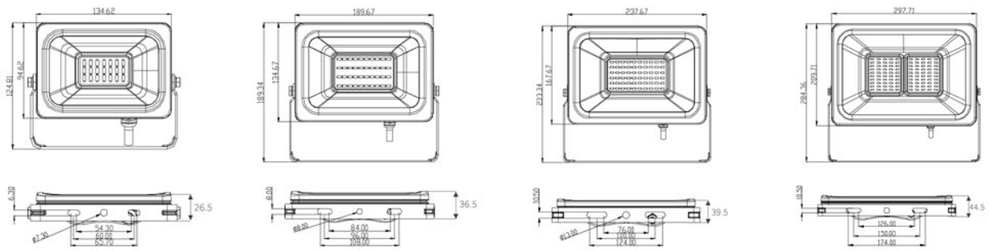

PRODUCT FEATURES

- 3D heatsink design, wide heatsink area,
- perfect for heat dissipation
- SMD LED, up to 100 lm/W, CRI 70+
- IP65 waterproof, outdoor use

- Operational Temperature Range -20-50℃
- Preservation Temperature Range -40-60℃
- Operational Humidity Range 95% Rh or below (@-20-50℃)

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	G.W
FL8910/10W/WW	100 -240V	10W	1000lm	WW(3000K-3500K)	120°	>70	0.47Kg
FL8910/10W/NW	100 -240V	10W	1000lm	NW(4000K-4500K)	120°	>70	0.47Kg
FL8910/10W/CW	100 -240V	10W	1000lm	CW(5000K-6500K)	120°	>70	0.47Kg
FL8910/20W/WW	100 -240V	20W	2000lm	WW(3000K-3500K)	120°	>70	0.97Kg
FL8910/20W/NW	100 -240V	20W	2000lm	NW(4000K-4500K)	120°	>70	0.97Kg
FL8910/20W/CW	100 -240V	20W	2000lm	CW(5000K-6500K)	120°	>70	0.97Kg
FL8910/30W/WW	100 -240V	30W	3000lm	WW(3000K-3500K)	120°	>70	1.57Kg
FL8910/30W/NW	100 -240V	30W	3000lm	NW(4000K-4500K)	120°	>70	1.57Kg
FL8910/30W/CW	100 -240V	30W	3000lm	CW(5000K-6500K)	120°	>70	1.57Kg
FL8910/50W/WW	100 -240V	50W	5250lm	WW(3000K-3500K)	120°	>70	2.45Kg
FL8910/50W/NW	100 -240V	50W	5250lm	NW(4000K-4500K)	120°	>70	2.45Kg
FL8910/50W/CW	100 -240V	50W	5250lm	CW(5000K-6500K)	120°	>70	2.45Kg

IP65

100W FL02 | 200W FL02

DIMENSIONS

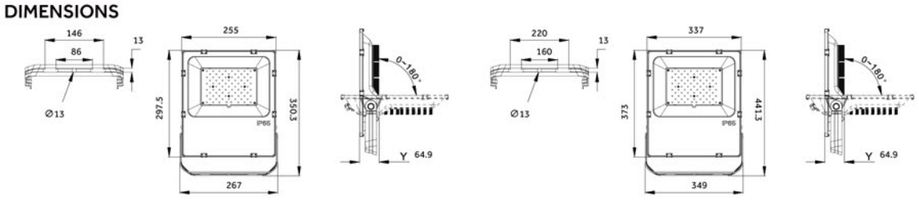

- Working Temperatre -40-50℃

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	G.W
FL02	100 -240V	100W	11906.363lm	5700K	110°	>70	2.80Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	G.W
FL02	100 -240V	200W	24964.358lm	5700K	110°	>70	4.7Kg

PHOTOMETRIC DATA

LIGHT DISTRIBUTION DIAGRAM



Total flux:11906.363 lm

LIGHT DISTRIBUTION DIAGRAM



Total flux:24964.358 lm

LED FLOOD LIGHT SERIES

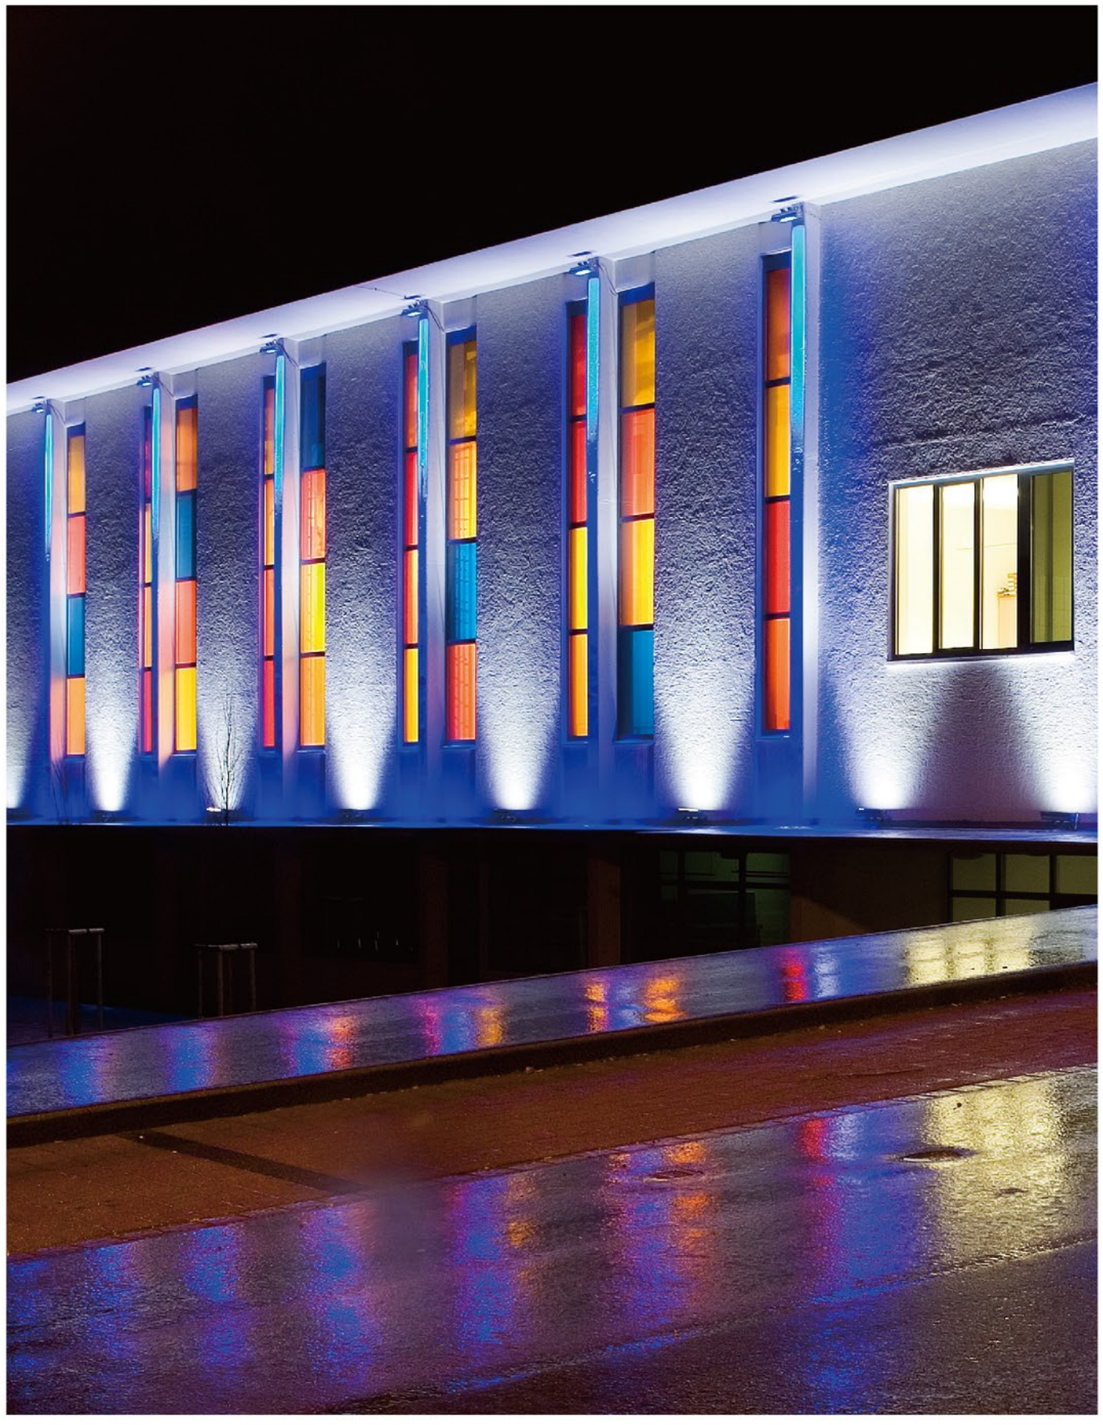

IK07 IP65

FL1030 /30W BK

FL1030/50W BK

SAA IEC RoHS IP65 30,000h Max 50°C -20°C

DIMENSIONS





PRODUCT FEATURES

- Robust punching press die-cast aluminium construction
- High light transmittance optical lens makes light transmittance can be 98%
- Water-proof and handy connectors
- IK 07
- Wall mounting ground mounting ceiling mounting with accessories

APPLICATIONS

- Stadium / Arena / Hotels / Wall / Plant

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI
FL1030 /30W BK	220 -240V	30W	3300lm	5700K	120°	>70

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI
FL1030/50W BK	220 -240V	50W	5500lm	5700K	120°	>70

LED HIGH BAY SERIES

Superior heat emission structure with patented technology and power supply configuration， the light can work efficiently and safely.
The extra accessories can be installed in ceiling mounted and bracket projection-type.
The unit construction of lamp adopt waterproof and dustproof design, it can meet the indoor and outdoor needs and other different application areas.

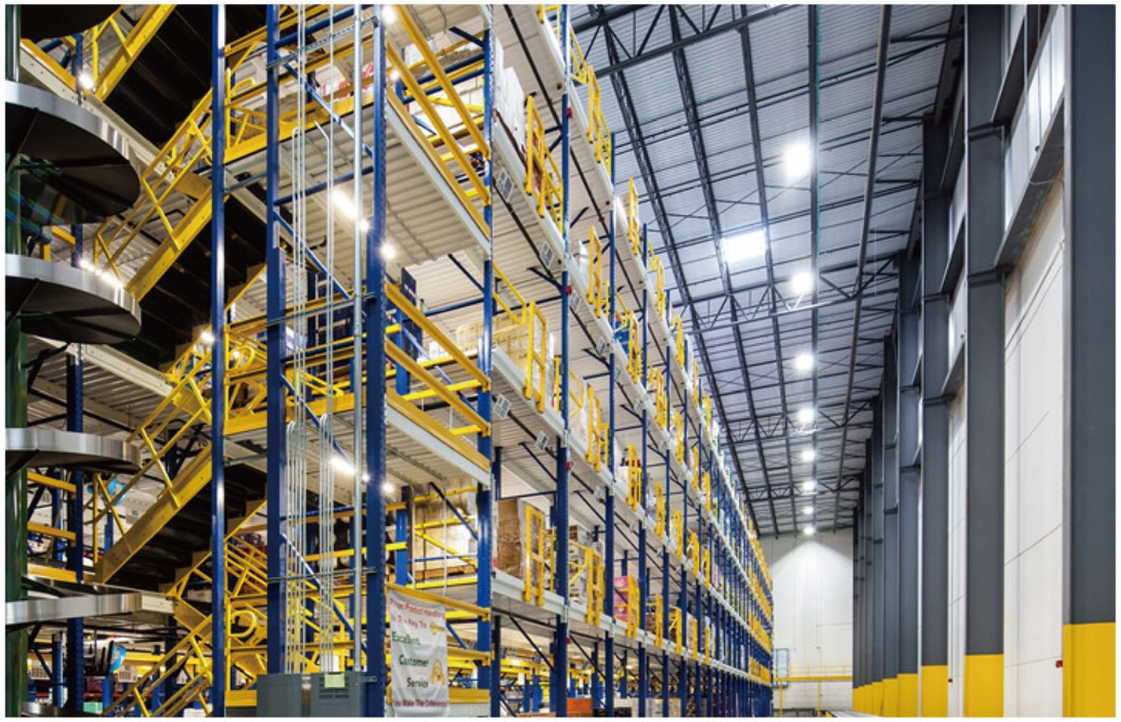

P53
KD-006-S150W

IP65 DIMMABLE

SAA CE

DIMENSIONS





PACKAGING(KD-006-S150W)

- Carton 1pcs/CTN
- Carton Size 365×365×225mm

PACKAGING(KD-006-S200W)

- Carton 1pcs/CTN
- Carton Size 425×425×215mm

MATERIAL

- Aluminum

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
KD-006-S150W/WW	220-240V	150W	150LM/W	3000K	120°	⩾80	Black	3.5Kg	4.2Kg
KD-006-S150W/NW	220-240V	150W	150LM/W	4000K	120°	⩾80	Black	3.5Kg	4.2Kg
KD-006-S150W/CW	220-240V	150W	150LM/W	6000K	120°	⩾80	Black	3.5Kg	4.2Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
KD-006-S200W/WW	220-240V	200W	150LM/W	3000K	120°	⩾80	Black	4.4Kg	5.8Kg
KD-006-S200W/NW	220-240V	200W	150LM/W	4000K	120°	⩾80	Black	4.4Kg	5.8Kg
KD-006-S200W/CW	220-240V	200W	150LM/W	6000K	120°	⩾80	Black	4.4Kg	5.8Kg

Motion and Daylight Sensor

IP65 DIMMABLE

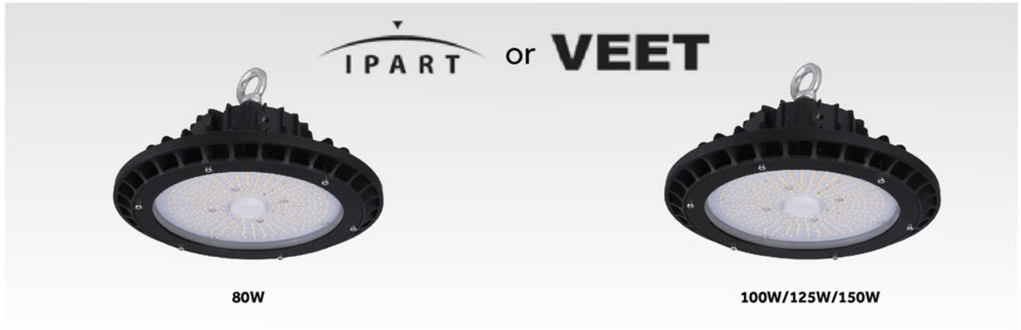

SAA CE

DIMENSIONS





PACKAGING(80W)

- Carton 1pcs/CTN
- Carton Size 310 × 310 × 225 mm

PACKAGING(100W/125W/150W)

- Carton 1pcs/CTN
- Carton Size 365X365X225mm

MATERIAL

- Aluminum

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
OPT-UFO4-265-80W	220-240V	80W	150LM/W	5000K	120°	⩾80	Black	2.6Kg	3.2Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
OPT-UFO4-320-100W	220-240V	100W	150LM/W	5000K	120°	⩾80	Black	3.5Kg	4.2Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
OPT-UFO4-320-125W	220-240V	125W	150LM/W	5000K	120°	⩾80	Black	3.5Kg	4.2Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
OPT-UFO4-320-150W	220-240V	150W	150LM/W	5000K	120°	⩾80	Black	3.5Kg	4.2Kg

LED CEILING LIGHT SERIES

High photosynthetic efficiency, less power consumption, long life, easy control, safe environmental protection and a new generation of cool light fittings.



P57
LED-15W AC1010

P60
LED-15W AC1020

P61
AC9001-15W



P64
AC1001/WB

LED-15W AC1010 | LED-18W AC1010 | LED-30W AC1010

DIMENSIONS



PRODUCT FEATURES

- High grade 5730 SMD LED chip with CRI>80
- Replacing CFL and halogen downlight application
- High efficiency LED chip and translucent diffuser
- PMMA Opal diffuser help to achieves uniform illumination
- Easy installation

PACKAGING(LED-15W AC1010)

- Carton 8pcs/CTN
- Carton Size L85.5*W31.5*H32mm

PACKAGING(LED-18W AC1010)

- Carton 5pcs/CTN
- Carton Size L57.5*W36*H36mm

PACKAGING(LED-18W AC1010)

- Carton 5pcs/CTN
- Carton Size L70*W43.5*H41mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
AC1010-15W WW	200-240V	15W	850lm	3000K	120°	>80	No	White	5.5Kg	7.5Kg
AC1010-15W DL	200-240V	15W	950lm	6000K	120°	>80	No	White	5.5Kg	7.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
AC1010-18W WW	200-240V	18W	1100lm	3000K	90°	>80	No	White	4.5Kg	6.5Kg
AC1010-18W DL	200-240V	18W	1200lm	6000K	90°	>80	No	White	4.5Kg	6.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
AC1010-30W WW	200-240V	30W	1700lm	3000K	120°	>80	No	White	5.5Kg	7.8Kg
AC1010-30W DL	200-240V	30W	1800lm	6000K	120°	>80	No	White	5.5Kg	7.8Kg

PHOTOMETRIC DATA

LED-15W AC1010

3000K



6000K



LED-18W AC1010

3000K



6000K



LED-30W AC1010

3000K



6000K



LED-15W AC1011 | LED-18W AC1011

DIMENSIONS

PRODUCT FEATURES

- High grade 2835 SMD LED chip with CRI>80
- Replacing CFL and halogen ceiling lamp applications
- High efficiency LED chip and translucent diffuser
- PMMA Opal diffuser help to achieves uniform illumination
- Easy installation

PACKAGING(15W)

- Packaging L295*W103*H295mm
- Carton 10pcs/CTN
- Carton Size L51.5*W31*H61mm

PACKAGING(18W)

- Packaging L340*W110*H340mm
- Carton 10pcs/CTN
- Carton Size L59*W37.5*H74mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
AC1011 WH/TC	200-240V	15W	850-900lm	3000K/4000K 6000K	120°	>80	No	White	5.0Kg	6.0Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
AC1011 WH/TC	200-240V	18W	1100-1200lm	3000K/4000K 6000K	120°	>80	No	White	7.0Kg	8.0Kg

PHOTOMETRIC DATA

3000K



4000K



6000K



>0.9 WW TC DL CW IP20

DIMENSIONS



PRODUCT FEATURES

- Luminaire efficacy of up to 95 lm/W.
- Pre-set tri-color-temperature switch for diverse needs.
- Includes built-in driver.
- Housing part with good heat dissipation and anti-shock compact structure to make it free from visible catches.
- Energy saving and international approval with CE, RoHS,
- SAA. Perfect used in home.

PACKAGING(15W)

- Packaging L295*W103*H295mm
- Carton 8pcs/CTN
- Carton Size L85.5*W31.5*H32mm

PACKAGING(18W)

- Packaging L340*W340*H110mm
- Carton 5pcs/CTN
- Carton Size L57.5*W36*H36mm

PACKAGING(30W)

- Packaging L415*W135*H390mm
- Carton 5pcs/CTN
- Carton Size L70*W43.5*H41.5mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1011 -LED-15W	200-240V	15W	1440lm/1665lm 1500lm	3000K/4000K 5000K	120°	>80	No	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1011 -LED-18W	200-240V	18W	1510lm/1770lm 1610lm	3000K/4000K 5000K	120°	>80	No	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1011 -LED-30W	200-240V	30W	1825lm/2145lm 1970lm	3000K/4000K 5000K	120°	>80	No	White

PHOTOMETRIC DATA

AC1011 -LED-15W AC1011 -LED-18W

3000K 4000K 6000K



AC1011 -LED-30W

3000K 4000K 6000K

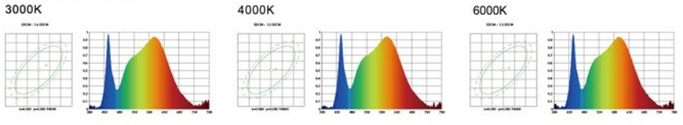



Use the pre-set switch to set color temperature before installation.

>0.9 WW TC DL CW IP20

DIMENSIONS

Santin Chrome



PRODUCT FEATURES

- Luminaire efficacy of up to 91 lumens per watt.
- Pre-set tri-color-temperature switch for diverse needs.
- Includes built-in driver.
- Housing part with good heat dissipation and anti-shock compact structure to make it free from visible catches.
- Energy saving and international approval with CE, RoHS,
- SAA. Perfect used in home.

PACKAGING(15W)

- Carton 10pcs/CTN

PACKAGING(20W)

- Packaging L355*W79*H357mm
- Carton 10pcs/CTN
- Carton Size L81*W36.5*H37.7cm

PACKAGING(30W)

- Packaging L453*W93*H453mm
- Carton 10pcs/CTN
- Carton Size L48.5*W46.5*H47.5cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1020 WH	200-240V	15W	920lm/1075lm 980lm	3000K/4000K 5000K	120°	>80	No	White
AC1020 SCH	200-240V	15W	920lm/1070lm 980lm	3000K/4000K 5000K	120°	>80	No	Santin Chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1020 WH	200-240V	20W	1440lm/1665lm 1500lm	3000K/4000K 5000K	120°	>80	No	White
AC1020 SCH	200-240V	20W	1440lm/1660lm 1500lm	3000K/4000K 5000K	120°	>80	No	Santin Chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC1020 WH	200-240V	30W	1440lm/1665lm 1500lm	3000K/4000K 5000K	120°	>80	No	White
AC1020 SCH	200-240V	30W	1440lm/1660lm 1500lm	3000K/4000K 5000K	120°	>80	No	Santin Chrome



Use the pre-set switch to set color temperature before installation.

IP54 DIMMABLE

AC9001-12W AC9001-15W AC9001-20W AC9001-30W

DIMENSIONS



PRODUCT FEATURES

- Luminaire efficacy of up to 85 lumens per watt.
- High quality SMD LEDs.
- IP54 waterproof.
- New design, super slim to 42mm height..

PACKAGING(12W)

- Packaging L205*W205*H50mm
- Carton 20pcs/CTN
- Carton Size L51.5*W42.5*H21.5mm

PACKAGING(15W)

- Packaging L260*W60*H340mm
- Carton 10pcs/CTN
- Carton Size L54*W32*H36.5mm

PACKAGING(20W)

- Packaging L310*W390*H60mm
- Carton 10pcs/CTN
- Carton Size L62*W33*H41.5mm

PACKAGING(30W)

- Packaging L410*W490*H60mm
- Carton 10pcs/CTN
- Carton Size L62*W43*H51.5mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-12W WH	200-240V	12W	2900lm	3000K	120°	>80	Yes	White
AC9001-12W WH	200-240V	12W	3000lm	5000K	120°	>80	Yes	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-15W WH	200-240V	15W	1400lm	3000K	120°	>80	Yes	White
AC9001-15W WH	200-240V	15W	1500lm	5000K	120°	>80	Yes	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-20W WH	200-240V	20W	1900lm	3000K	120°	>80	Yes	White
AC9001-20W WH	200-240V	20W	2000lm	5000K	120°	>80	Yes	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-30W WH	200-240V	30W	2900lm	3000K	120°	>80	Yes	White
AC9001-30W WH	200-240V	30W	3000lm	5000K	120°	>80	Yes	White

IP54 DIMMABLE

AC9001-15W AC9001-20W AC9001-30W

DIMENSIONS



PRODUCT FEATURES

- Luminaire efficacy of up to 100 lumens per watt.
- High quality SMD LEDs.
- IP54 waterproof.
- New design, super slim to 42mm height.

PACKAGING(15W)

- Packaging L260*W60*H340mm
- Carton 10pcs/CTN
- Carton Size L54*W32*H36.5mm

PACKAGING(20W)

- Packaging L310*W390*H60mm
- Carton 10pcs/CTN
- Carton Size L62*W33*H41.5mm

PACKAGING(30W)

- Packaging L410*W490*H60mm
- Carton 10pcs/CTN
- Carton Size L62*W43*H51.5mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-15W WH	200-240V	15W	1400lm	3000K	120°	>80	Yes	Santin Chrome
AC9001-15W WH	200-240V	15W	1500lm	5000K	120°	>80	Yes	Santin Chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-20W SCH	200-240V	20W	1900lm	3000K	120°	>80	Yes	Santin Chrome
AC9001-20W SCH	200-240V	20W	2000lm	5000K	120°	>80	Yes	Santin Chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9001-30W SCH	200-240V	30W	2900lm	3000K	120°	>80	Yes	Santin Chrome
AC9001-30W SCH	200-240V	30W	3000lm	5000K	120°	>80	Yes	Santin Chrome

LED CEILING LIGHT SERIES

IP54 DIMMABLE

LED-15W AC9002 LED-20W AC9002 LED-30W AC9002

SAA

DIMENSIONS

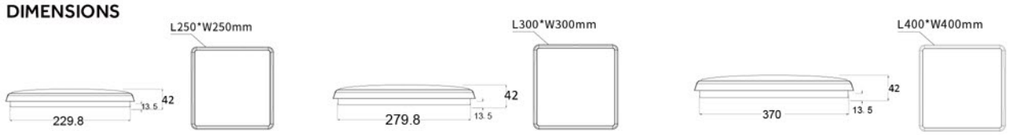

PRODUCT FEATURES

- Luminaire efficacy of up to 100 lumens per watt.
- High quality SMD LEDs.
- IP54 waterproof.
- New design, super slim to 42mm height.

PACKAGING(15W)

- Carton 10pcs/CTN

PACKAGING(20W)

- Carton 10pcs/CTN

PACKAGING(30W)

- Packaging L410*W60*H490mm
- Carton 10pcs/CTN
- Carton Size L62*W43*H51.5mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9002-15W WH	200-240V	15W	1400lm	3000K	120°	>80	Yes	White
AC9002-15W WH	200-240V	15W	1500lm	5000K	120°	>80	Yes	White
AC9002-15W SCH	200-240V	15W	1400lm	3000K	120°	>80	Yes	Santin Chrome
AC9002-15W SCH	200-240V	15W	1500lm	5000K	120°	>80	Yes	Santin Chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9002-15W WH	200-240V	20W	1900lm	3000K	120°	>80	Yes	White
AC9002-15W WH	200-240V	20W	2000lm	5000K	120°	>80	Yes	White
AC9002-15W SCH	200-240V	20W	1900lm	3000K	120°	>80	Yes	Santin Chrome
AC9002-15W SCH	200-240V	20W	2000lm	5000K	120°	>80	Yes	Santin Chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
AC9002-30W WH	200-240V	30W	2900lm	3000K	120°	>80	Yes	White
AC9002-30W WH	200-240V	30W	3000lm	5000K	120°	>80	Yes	White
AC9002-30W SCH	200-240V	30W	2900lm	3000K	120°	>80	Yes	Santin Chrome
AC9002-30W SCH	200-240V	30W	3000lm	5000K	120°	>80	Yes	Santin Chrome

ES LAMP HOLDER

15W AND 30W LED VERSION AVAILABLE

AC1001/WB AC1001/30 AC1001/40 AC1001/50

DIMENSIONS

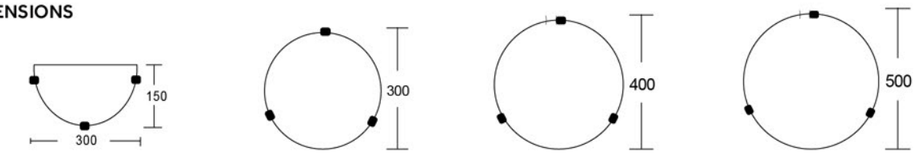

Alabaster wall light SHC/GD
SIZE: 300×150mm
E27 MAX 1×75W
AC240V

Alabaster SHC/GD
SIZE: 300×300mm
E27 MAX 1×75W
AC240V

Alabaster SHC/GD
SIZE: 400×400mm
E27 MAX 2×75W
AC240V

Alabaster SHC/GD
SIZE: 500×500mm
E27 MAX 4×75W
AC240V

15W AND 30W LED VERSION AVAILABLE

AC1002/30/WB AC1002/30 AC1002/40

DIMENSIONS

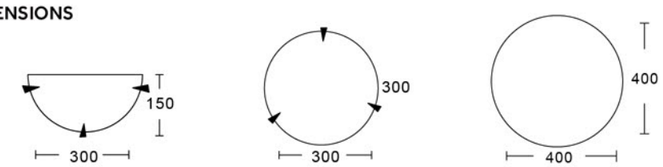

spike wall light
Color: sch clip
SIZE: 300X150mm
E27 MAX 1X75W
AC240V

spike
Color: sch clip
SIZE: 300X300mm
E27 MAX 1X75W
AC240V

spike
Color: sch clip
SIZE: 400X400mm
E27 MAX 2X75W
AC240V

15W AND 30W LED VERSION AVAILABLE

DIMENSIONS



square spike wall light
Color: ch clips
SIZE: 300X150mm
E27 MAX 1X75W
AC240V



square spike
Color: ch clips
SIZE: 300X300mm
E27 MAX 1X75W
AC240V



square spike
Color: ch clips
SIZE: 400X400mm
E27 MAX 2X75W
AC240V

15W AND 30W LED VERSION AVAILABLE

DIMENSIONS



Round glass C clips
SIZE: 300X150mm
E27 MAX 1X75W
AC240V



Round glass C clips
SIZE: 400X400mm
E27 MAX 1X75W
AC240V



Round glass C clips
SIZE: 300X150mm
E27 MAX 1X75W
AC240V

15W AND 30W LED VERSION AVAILABLE

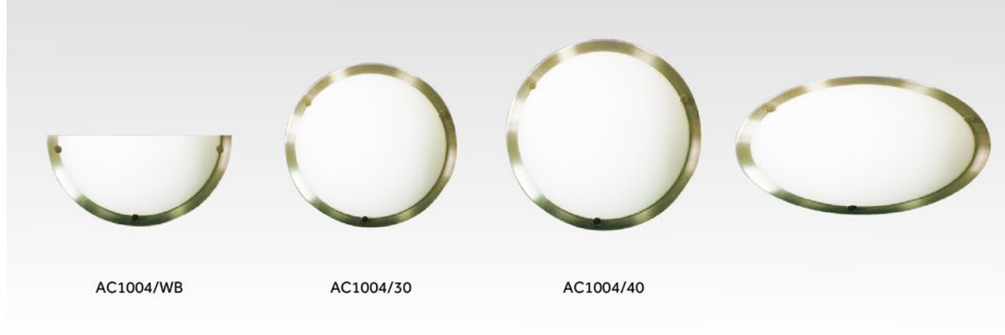

DIMENSIONS



Color: sch wall clip
SIZE: 300X150mm
E27 MAX 1X75W
AC240V



Color: sch trim
SIZE: 300X300mm
E27 MAX 1X75W
AC240V



Color: sch trim
SIZE: 400X400mm
E27 MAX 2X75W
AC240V

LED BATTEN SERIES AND LED FLUORESCENT SERIES

Green environmental protection, low heat, high luminous efficiency,high brightness, good color, long life, high efficiency and energy saving.

P69
25W LED-ARC

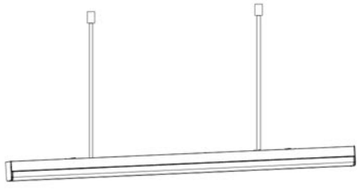

P71
LED/BT 20W TC

IP54

25W LED-ARC 40W LED-ARC

DIMENSIONS

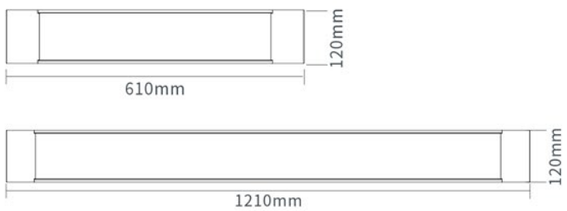

PRODUCT FEATURES

- High colour rendering index (CRI) of over 80.
- Luminaire efficacy of up to 100 lumens per watt.
- High quality SMD LEDs.
- Easy installation.

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
LED-ARC	200-240V	25W	2400-2500lm	5000K	120°	>80	No	White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
LED-ARC	200-240V	40W	3900-4000lm	5000K	120°	>80	No	White

LED Slim Batten

>0.9 IP20

LB-18W LB-36W LS-18W /TC LS-36W /TC

PRODUCT FEATURES

- Easy for installation
- Cental hole for input power cable
- Built -in terminal block
- Aluminium body and PC cover
- IP20 for indoor use
- Available for 3 CCT switch control (3000K / 4000K / 6000K)

- Material PC + ALU

Model No.	Input	Power	Efficiency	CCT	Beam Angle	CRI	3CCT	Fitting Colour	Size
LB-18W /5500K	175 -265V	18W	80-100lm/w	5500K	120°	>80	No	White	600*75*30mm
LB-36W/5500K	175 -265V	36W	80-100lm/w	5500K	120°	>80	No	White	1200*75*30mm

Model No.	Input	Power	Efficiency	CCT	Beam Angle	CRI	3CCT	Fitting Colour	Size
LS-18W /TC	175 -265V	18W	80-100lm/w	3000K/4000K/6000	120°	>80	Yes	White	600*75*30mm
LS-36W /TC	175 -265V	36W	80-100lm/w	3000K/4000K/6000	120°	>80	Yes	White	1200*75*30mm

LED BATTEN SERIES

IP20

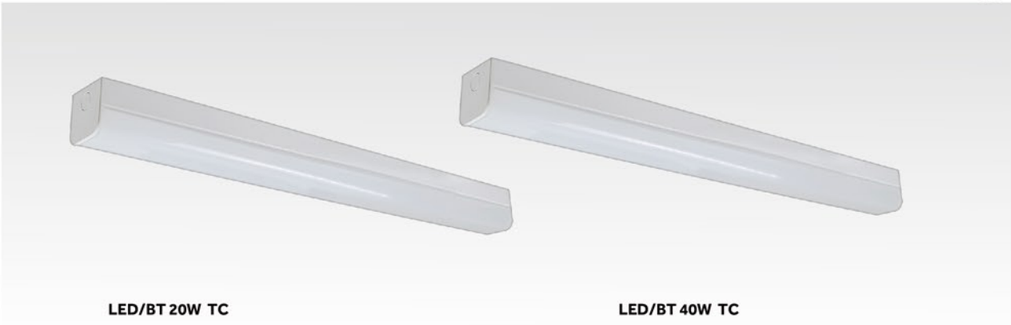

DIMENSIONS

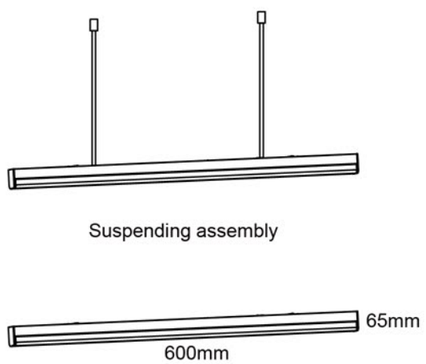

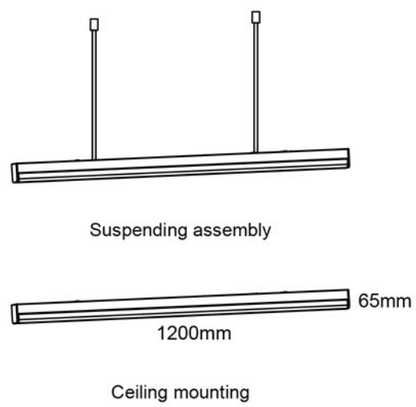

PRODUCT FEATURES

- Quality white powder coat finish with robust polycarbonate diffuser
- Large terminal block, easy installation
- Easy selectable colour temperature with an inbuilt DIP switch 3000, 4000, 5700K
- High efficiency SMD LED chips, CRI > 80 120 degree beam distribution
- Integral constant current non-dimmable LED driver 20 and 40 watt models

PACKAGING(20W)

- Packaging L636*W100*H100mm
- Carton 10pcs/CTN
- Carton Size L650*W515*H225cm

PACKAGING(40W)

- Packaging L1236*W100*H100mm
- Carton 5pcs/CTN
- Carton Size L1250*W515*H125cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
LED/BT 20W TC	220-240V	20W	1700lm/1900lm 1830lm	3000K/4000K 5700K	100°	>80	Yes	White	9.6Kg	12.4Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
LED/BT 40W TC	220-240V	20W	3500lm/3800lm 3650lm	3000K/4000K 5700K	100°	>80	Yes	White	9Kg	11.8Kg

LED WEATHER PROOF BATTEN SERIES

IP67

LED/DPB 118WP

LED/DPB 218WP

LED/DPB 136WP

LED/DPB 236WP

PRODUCT FEATURES

- IP67
- Polycarbon Cover and back plate.
- Electronic ballast, instant start.
- 6400K triphosphor tubes included.
- Need datesheet from supplier

LED 218 WP EMC

IP67

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
SP210WPEM	220 -240V	2*10W	1150 lm	4000K	0.95	⩾80	White	L665*W128*H100mm
SP210WPEM	220 -240V	2*10W	1150 lm	6000K	0.95	⩾80	White	L665*W128*H100mm

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
SP218WPEM	220 -240V	2*18W	2300 lm	4000K	0.95	⩾80	White	L1262*W128*H100mm
SP218WPEM	220 -240V	2*18W	2300 lm	6000K	0.95	⩾80	White	L1262*W128*H100mm

Sp 1001

Model No.	classification	CCT	Body size
SP-1001-EM/DL	D25	Day Light	∅ 380*H100mm
SP-1001-EM/WW	D25	Warm White	∅ 380*H100mm
SP-1001-EM/CW	D25	Cool White	∅ 380*H100mm
SP-1001-EM/DL-Sensor	D25	Day Light	∅ 380*H100mm
SP-1001-EM/WW-Sensor	D25	Warm White	∅ 380*H100mm
SP-1001-EM/CW-Sensor	D25	Cool White	∅ 380*H100mm

Model No.				
SP-1001-EM/DL	Surface mount	Maintain	AC: 24W DC: 1W	IP20
SP-1001-EM/WW	Surface mount	Maintain	AC: 24W DC: 1W	IP20
SP-1001-EM/CW	Surface mount	Maintain	AC: 24W DC: 1W	IP20
SP-1001-EM/DL-Sensor	Surface mount	Maintain	AC: 24W DC: 1W	IP20
SP-1001-EM/WW-Sensor	Surface mount	Maintain	AC: 24W DC: 1W	IP20
SP-1001-EM/CW-Sensor	Surface mount	Maintain	AC: 24W DC: 1W	IP20

Model No.			
SP-1001-EM/DL	NI-MH 4.8V 1800MAH	120minutes	5pcs/CTN
SP-1001-EM/WW	NI-MH 4.8V 1800MAH	120minutes	5pcs/CTN
SP-1001-EM/CW	NI-MH 4.8V 1800MAH	120minutes	5pcs/CTN
SP-1001-EM/DL-Sensor	NI-MH 4.8V 1800MAH	120minutes	5pcs/CTN
SP-1001-EM/WW-Sensor	NI-MH 4.8V 1800MAH	120minutes	5pcs/CTN
SP-1001-EM/CW-Sensor	NI-MH 4.8V 1800MAH	120minutes	5pcs/CTN

PRODUCT FEATURES

- The SP1001/EM is designed as a maintained emergency lamp
- Allowing 2hours minimum lighting after power cut.
- SAA approved, AS/NZS2293

Emergency LED Batten

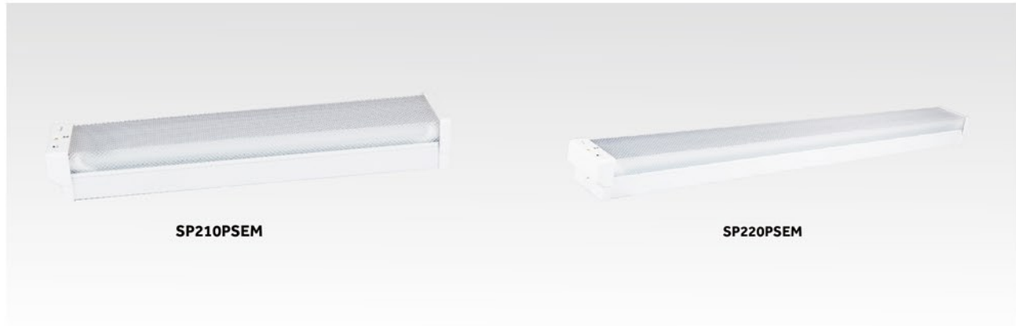

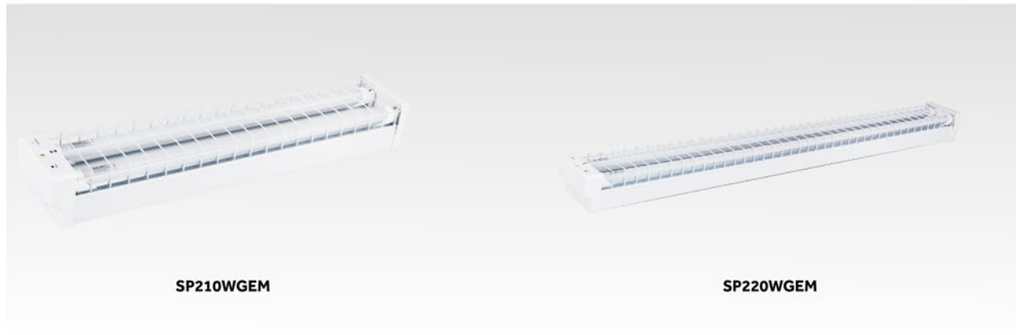

PRODUCT FEATURES

- Cost-effective light-line solution for industrial
- Commercial and other applications
- Flexible solution
- Enerrgy-saving and environmental protection.

Materrial	Metal+PS
DC Stage Light Source	3W LED Chip (DC Wattage: 1.7W)
Battery	4.8V 1800mAH NI-MM
Charge Time	16 Hours
Discharge Time	2 Hours
LED Lifespan	40000 Hours
Work Mode	Maintain
Installation	Surface Mounting
Test	Red-Charging
Connection	Teminal Block
Protection	Over-Charge / Over-Discharge
Classification	C0:D25 , C90:D25
Standard	As2293 IEC60598-2-22

Model No.	Input	Power	Emergency Lumen	CCT	CRI	Fitting Colour	Dimension
SP210PSEM	220 -240V	2*9W	140lm	5700K	⩾80	White	637*120*88mm

Model No.	Input	Power	Emergency Lumen	CCT	CRI	Fitting Colour	Dimension
SP220PSEM	220 -240V	2*18W	140lm	5700K	⩾80	White	1247*120*88mm

Model No.	Input	Power	Emergency Lumen	CCT	CRI	Fitting Colour	Dimension
SP210WGEM	220 -240V	2*9W	140lm	5700K	⩾80	White	637*120*88mm

Model No.	Input	Power	Emergency Lumen	CCT	CRI	Fitting Colour	Dimension
SP220WGEM	220 -240V	2*18W	140lm	5700K	⩾80	White	1247*120*88mm

LED Batten Fitting With LED Tube (PMMA Diffuser)

LED Batten Fitting With LED Tube (Wire Guard)

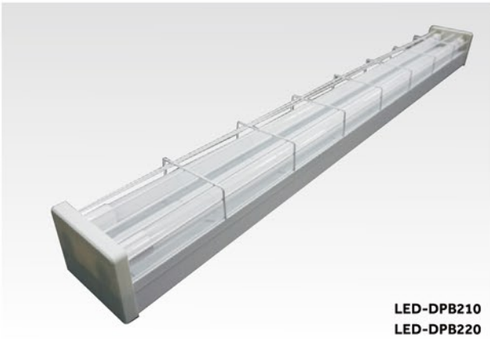

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
LED-DPB210	220 -240V	20W	2300 lm	5700K	0.95	⩾80	White	L620*W124*H90mm

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
LED-DPB220	220 -240V	40W	4600 lm	5700K	0.95	⩾80	White	L1230*W124*H90mm

LED Batten Fitting With LED Tube (PMMA Diffuser)

LED Batten Fitting With LED Tube (Wire Guard)

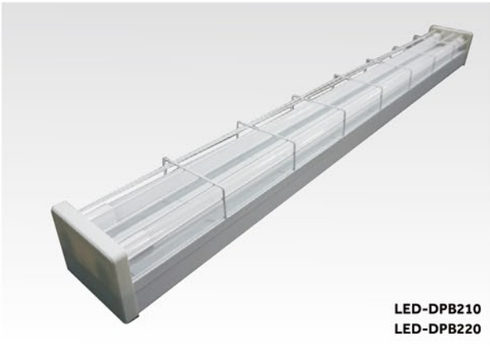

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
LED-DPA110	220 -240V	10W	1150 lm	5700K	0.95	⩾80	White	L620*W124*H90mm

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
LED-DPA120	220 -240V	20W	2300 lm	5700K	0.95	⩾80	White	L1230*W124*H90mm

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
LED-DPB110	220 -240V	10W	1150 lm	5700K	0.95	⩾80	White	L620*W124*H90mm

Model No.	Input	Power	Lumen	CCT	Power factor	CRI	Fitting Colour	Body size
LED-DPB120	220 -240V	20W	2300 lm	5700K	0.95	⩾80	White	L1230*W124*H90mm

LED Tube

IP20

Model No.	Input	Power	Lumen	CCT	Body size	Power factor	CRI	Dimmable	Fitting Colour
T8P10L06	220 -240V	10W	1150 lm	5000K	L604 D26	0.95	⩾80	No	White

Model No.	Input	Power	Lumen	CCT	Body size	Power factor	CRI	Dimmable	Fitting Colour
T8P20L12	220 -240V	20W	2300 lm	5000K	L1214 D26	0.95	⩾80	No	White



ACCESSORIES

End cap with hole
End cap without hole

PC diffused cover

PC transparent cover

Aluminum profile

Mounting clip (metal)

LED PANEL LIGHT SERIES



P81
OB-PD6060-V0

Backlit LED Panel Light

36W,3600LM
600x600mm/1200x300mm
1-CCT and 3-CCT optional

UGR<19 | No LGP No yellowing | IP20 | DIMMABLE

DIMENSIONS



L595×W595×H34mm



L295×W1195×H34mm



LPA new /18W 600×300

LPA new /40W 600×600

LPB new/40W 1200×300
LPB new/40W 1200×300 Tc

PACKAGING(600×300mm)

- Carton 10pcs/CTN
- Carton Size L64×W36×H34cm

PACKAGING(600×600mm)

- Carton 6pcs/CTN
- Carton Size L64×W23×H64cm

PACKAGING(1200×300mm)

- Carton 6pcs/CTN
- Carton Size L124×W23×H34cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
LPA new /18W 600×300	220-240V	18W	1500LM	6000K	120°	>80	White	10.2Kg	11.0Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
LPA new /40W 600×600	220-240V	40W	3200LM	4000K	120°	>80	White	19.5Kg	21.0Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
LPB new/40W 1200×300	220-240V	40W	3200LM	4000K	120°	>80	White	22.5Kg	24.5Kg
LPB new/40W 1200×300	220-240V	40W	3200LM	6000K	120°	>80	White	22.5Kg	24.5Kg

Model No.	Input	Power	Lumen	Tri-CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
LPB new/40W 1200×300 Tc	220-240V	40W	3200LM	3000K/4000K/6000K	120°	>80	White	22.5Kg	24.5Kg

Backlit LED Panel Light IPART or VEET

25W,3000LM
1200x300mm

UGR<19 | No LGP No yellowing | DIMMABLE | IP20

DIMENSIONS

L295×W1195×H34mm



PACKAGING(1200×300mm)

- Carton 6pcs/CTN
- Carton Size L124×W23×H34cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	N.W	G.W
SB-OBPL2-1x4-25W	220-240V	25W	120LM/W	5000K	120°	>80	White	22.5Kg	24.5Kg

Specification (Recessed Mounting Bracket for Panel Light)

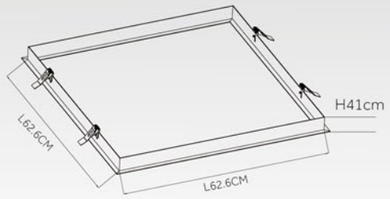

OB-PD6060-V0

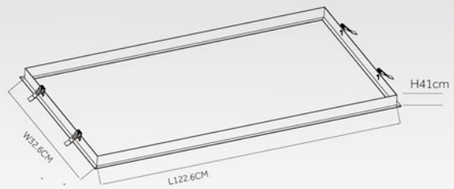

OB-PD1230-V0

L61.4×W61.4cm

W31.4×L121.4cm

PACKAGING(OB-PD6060-V0)

- Packaging 67×47.5×68 cm
- Carton 10pcs/CTN

Component

- Spring clip (4pcs) / Screw with nut (4pcs)

Use for Panel Light(European standard)
59.5×59.5cm

PACKAGING(OB-PD6060-V0)

- Packaging 127×47.5×38cm
- Carton 10pcs/CTN

Component

- Spring clip (4pcs) / Screw with nut (4pcs)

Use for Panel Light(European standard)
29.5×119.5cm

Specification
(Recessed Mounting Bracket for Panel Light)

• Drawing

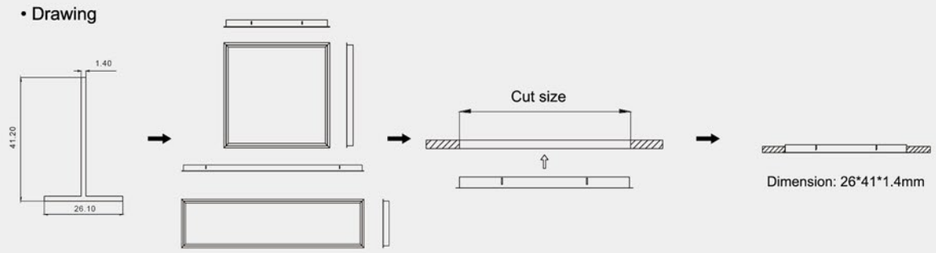

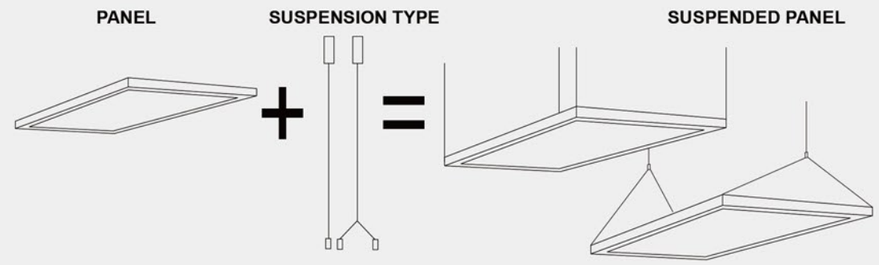

LED SPOT SERIES

LED spot lights are most popular for outdoor commercial lighting but they can also deliver lower running costs, higher life cycles and safe low voltages that make them perfect for indoor and outdoor projects.



P85
1024D 4+151D



P86
1031D 4+151D

Globes Not Included

1024D 4+151D

1033A 4+151A

DIMENSIONS





Model No.	Input	Power	Light source	Dimension
1024D	200-240V	13W	4*GU10	100 * 580mm
4+151D	200-240V	9W	4*LED GLBOE	100 * 580mm

Model No.	Input	Power	Light source	Dimension
1033A	200-240V	13W	4*GU10	250*100mm
4+151A	200-240V	9W	4*LED GLBOE	250*100mm

Globes Not Included



Model No.	Power	Light source	Dimension
1031D	13W	1*GU10	130*180mm
1+151D	9W	1*LED GLBOE	130*180mm



Model No.	Power	Light source	Dimension
1031D	13W	2*GU10	400*130mm
2+151D	9W	2*LED GLBOE	400*130mm



Model No.	Power	Light source	Dimension
1031D	13W	3*GU10	560*130mm
3+151D	9W	3*LED GLBOE	560*130mm



Model No.	Power	Light source	Dimension
1031D	13W	4*GU10	760*13mm
4+151D	9W	4*LED GLBOE	760*13mm

Globes Not Included



Model No.	Power	Light source	Dimension
1031A	13W	1*GU10	120*180mm
1+151A	9W	1*LED GLBOE	120*180mm



Model No.	Power	Light source	Dimension
1031A	13W	2*GU10	400*120mm
1+151A	9W	2*LED GLBOE	400*120mm



Model No.	Power	Light source	Dimension
1031A	13W	3*GU10	560*120mm
1+151A	9W	3*LED GLBOE	560*120mm



Model No.	Power	Light source	Dimension
1031A	13W	4*GU10	760*13mm
1+151A	9W	4*LED GLBOE	760*13mm

LED OUTDOOR LIGHT SERIES

P91
2122

P93
2124

Up/Down Wall Pillar Spot Lights 2122

2122-R-S | 2122-R-W | 2122-R-B | 2122-R-T

PRODUCT FEATURES

- Up/down wall pillar light
- Aluminium powder coated black/white;
- Titanium/sliver coloured aluminium
- High output reflector to maximise light
- IP rating: IP65
- Round/square base
- 240v GU10 2x35w max

DIMENSIONS



Model No.	Input	Lumen	CCT	Beam Angle	CRI
2122	240V 50Hz	2x540lm	3000K	120°	>80
2122	240V 50Hz	2x540lm	6000K	120°	>80

Single Adjustable Spot Light 2133

2133 Stainless steel 316 | **2112** Solid coppe | **2123-W** Aluminium powder coated | **2123-B** Aluminium powder coated | **2123-T** Titanium coloured aluminium

PRODUCT FEATURES

- Single adjustable wall pillar light
- High output reflector to maximise light
- IP rating: IP65
- 240v GU10 35w max
- Stainless steel 316/Solid copper;
- Aluminium powder coated black/white;
- Titanium/sliver coloured aluminium

DIMENSIONS



Model No.	Input	Lumen	CCT	Beam Angle	CRI
2133	240V 50Hz	540lm	3000K	120°	>80
2133	240V 50Hz	540lm	6000K	120°	>80

Fixed Wall Pillar Spot Light 2131

2121-S Sliver coloured aluminium | **2131** Stainless steel 316 | **2114** Solid copper | **2121-B** Aluminium powder coated | **2121-W** Aluminium powder coated | **2121-T** Titanium coloured aluminium

PRODUCT FEATURES

- Single adjustable wall pillar light
- High output reflector to maximise light
- IP rating: Ip65
- 240v GU10 35w max
- Stainless steel 316/Solid copper;
- Aluminium powder coated black/white;
- Titanium/sliver coloured aluminium

DIMENSIONS



Model No.	Input	Lumen	CCT	Beam Angle	CRI
2131	240V 50Hz	540lm	3000K	120°	>80
2131	240V 50Hz	540lm	6000K	120°	>80

Titanium Anodized

DIMENSIONS



Model No.	Input	CRI	Fitting Colour	Lamp Holder
2124	220 -240V	>80	Tianium	2*GU10.35W MAX
2124	220 -240V	>80	Matt Black	2*GU10.35W MAX

DIMENSIONS



Model No.	Input	Material	CRI	Fitting Colour	Lamp Holder
2142 T	220 -240V	Aluminium body	>80	Tianium	2*GU10.35W MAX
2142-BK	220 -240V	Aluminium body	>80	Matt Black	2*GU10.35W MAX

DIMENSIONS



Model No.	Input	Material	CRI	Fitting Colour	Lamp Holder
2143 T	220 -240V	Aluminium body	>80	Tianium	3*GU10.35W MAX
2143 BK	220 -240V	Aluminium body	>80	Matt Black	3*GU10.35W MAX

DIMENSIONS

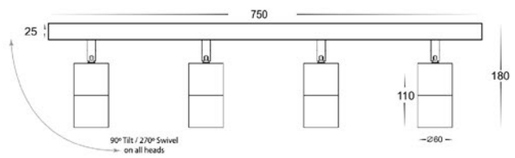

Model No.	Input	Material	CRI	Fitting Colour	Lamp Holder
2144 T	220 -240V	Aluminium body	>80	Tianium	4*GU10.35W MAX
2144 BK	220 -240V	Aluminium body	>80	Matt Black	4*GU10.35W MAX

DIMENSIONS



Model No.	Input	CRI	Fitting Colour	Lamp Holder
2324	220 -240V	>80	316 Stainless Stee	1*GU10.35W MAX
2324	220 -240V	>80	Matt Black	1*GU10.35W MAX
2324	220 -240V	>80	Matt White	1*GU10.35W MAX

DIMENSIONS



Model No.	Input	Power	CCT	CRI	Fitting Colour
2360	AC240V	6W	3000K/6000K	>80	316 Stainless Stee
2360	AC240V	6W	3000K/6000K	>80	Matt Black

EXTERIOR LIGHT SERIES

Exterior lights include LED deck lights, garden spike lights, bollard,up & down, up & down with long body, up & down with sensor, LED up & down, square up & down, flood lights, wall lights, wall mounted, bunkers, stainless steel bunkers, post lights.



P99
814A

P99
813A



P109
ST5089

P117
LF-372046R

LED DECK LIGHTS

PRODUCT FEATURES

- Superbright LED
- With built-in transformer;
- Stainless steel cover+
- Aluminum body+plastic house
- LED color available white/blue

DIMENSIONS

812A 812B

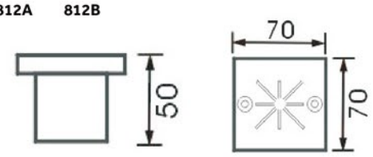

811A 811G



814A 814B

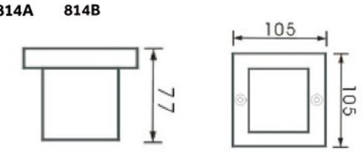

813A 813G



Model No.	CRI	Inbox Size	Led Quantity
812A	>80	80X80X80mm	9PCS
814A	>80	115X115X85mm	16PCS

Model No.	CRI	Inbox Size	Led Quantity
812B	>80	80X80X80mm	9PCS
814B	>80	115X115X85mm	16PCS

Model No.	CRI	Inbox Size	Led Quantity
811A	>80	120X55X60mm	12PCS
813A	>80	175X75X90mm	16PCS

Model No.	CRI	Inbox Size	Led Quantity
811G	>80	120X55X60mm	12PCS
813G	>80	175X75X90mm	16PCS

GLOBES INCLUDED 805F

DIMENSIONS

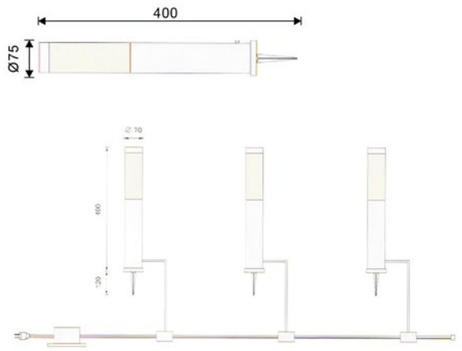

GARDEN SPIKE LIGHTS

PRODUCT FEATURES

- Stainless steel 304 grade
- Spike length: 220mm or 600mm or 1200mm
- IP64
- 2m reinforced cable
- 12V MR16, long body
- Compatible with energy saving LED
- Include MR16 12V 20W halogen globe

DIMENSIONS



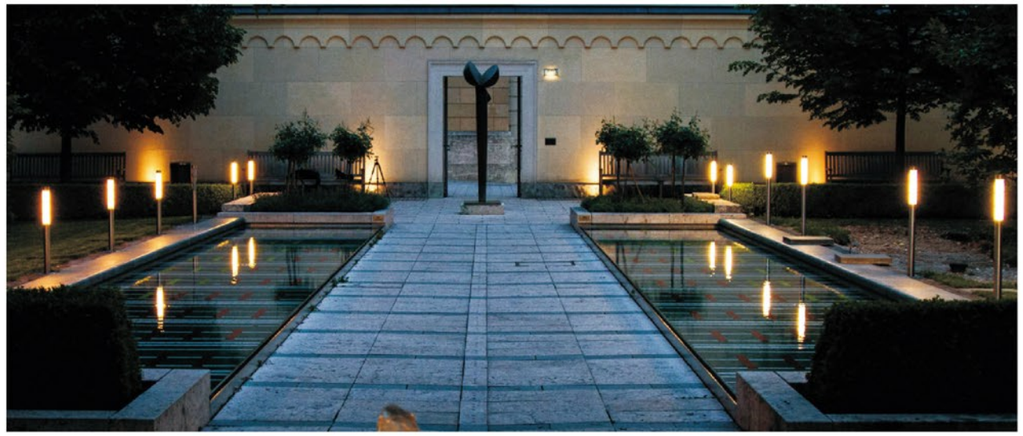

IP65

PRODUCT FEATURES

- Single adjustable spike spotlight
- IP rating: IP65
- MR16 12v 20W max
- Solid Copper/Stainless Steel 316/Aluminium
- 250mm extension rod (Optional)

DIMENSIONS



Model No.	Input	Power	Lumen	CCT	Beam Angle
MR16 9W WH/WW	AC/DC 12V	9W	540lm	3000K	120°
MR16 9W WH/DL	AC/DC 12V	9W	540lm	6000K	120°

IP67

IN - GROUND DECK LIGHT 5111

IP65

JD-CD75C02C

DIMENSIONS

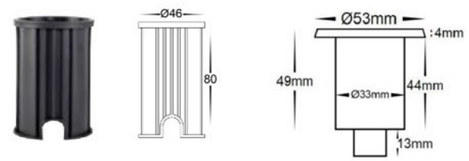

DIMENSIONS

PACKAGING(JD-CD75C02C)

- Packaging L43*W35.5*H26cm
- Carton 30pcs/Carton
- Carton Size L43*W35.5*H26cm
- Weight 0.4kgs/pcs

Model No.	Input	Power	CCT	Fitting Colour	Matrial	Cutout With Canister	Cutout Without Canister
IN - GROUND DECK LIGHT 5111	DC 12V	1W	3000K	Stainless Steel	Staninless Steel 316	∅46mm	∅38mm

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
JD-CD75C02C	DC/AC12V	6W	60lm/W	Daylight5500K (3000K available too)	>80	45°	Black

IP44

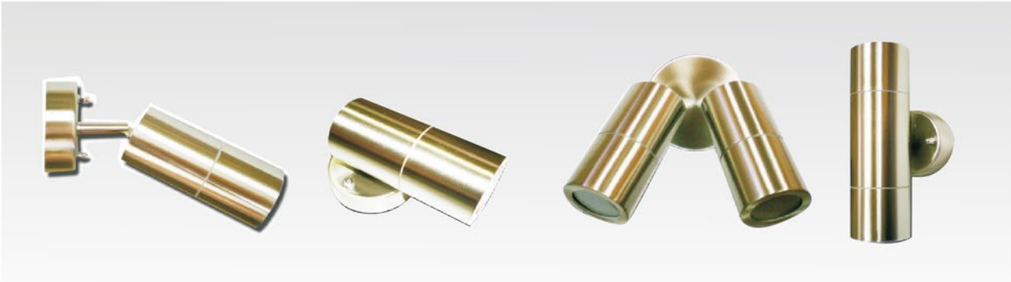

146A+C EX
UP OR DOWN ADJUSTABLE

146B+C EX
UP OR DOWN FIXED

146A+C DNEX UP OR DOWN
DOUBLE ADJUSTABLE

146C+C EX UP OR DOWN

PRODUCT FEATURES

- Stainless steel body 304
- Diffuser: clear glass diffuser
- Extra long body to fix
- Energy saving globes
- Globes not included
- GU10 240V

DIMENSIONS

IP44

146B+C SEN

IP44

146C+C SEN

DIMENSIONS

Excl bulb

Excl bulb

PRODUCT FEATURES

- Stainless steel body 304
- Diffuser: clear glass diffuser
- Extra long body to fix
- Energy saving globes
- Globes not included
- GU10 240V

Model No.	Input	GU10MAX	Diffusor	Size
146B+C SEN	AC240V	35W	Glass	L110XW70XH150mm

Model No.	Input	GU10MAX	Diffusor	Size
146C+C SEN	AC240V	35W	Glass	L110XW70XH150mm

257 Bulb included(35W halogen)

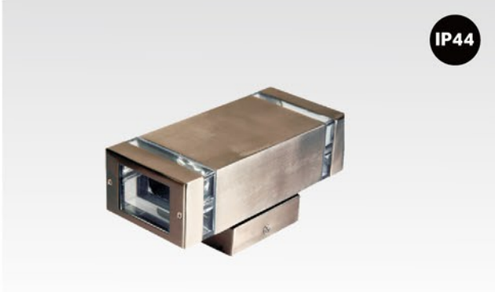

257-2 Bulb included(35W halogen)

DIMENSIONS





Model No.	Input	GU10MAX	Diffusor	Material
257	AC240V	35W	Clear PC	Stainless steel body 304
257-2	AC240V	35W	Clear PC	Stainless steel body 304

Bulb included(35W)

DIMENSIONS







Model No.	Input	GU10MAX	Diffusor	Material
256	AC240V	35W	Clear PC	Stainless steel body 304

DIMENSIONS



Model No.	Size	Material
SA031/SS	280X220X90mm	Stainless steel

Model No.	Size	Fitting Colour
SA031/BLK	280X220X90mm	Black

Model No.	Size	Material
SA031/SS+SEN	280X220X90mm	Stainless steel with senor

Model No.	Size (ExWxH)	MAX	Colour	Package
WX4011	26x18x14cm	60W	Black, White	8pcs/1ctn
WX4017	26x13x11.5cm	60W	Black, Silver, White	12pcs/1ctn
WX4018	26x13x11.5cm	60W	Black, Silver, White	12pcs/1ctn
WX4019	26x13x11.5cm	60W	Black, Silver, White	12pcs/1ctn

:

:

Model No.	Size (ExWxH)	MAX	Colour	Package
WX4026	27x7.5cm	60W	Black, Silver, White	8pcs/1ctn
WX4028	27x8.5cm	60W	Black, Silver, White	8pcs/1ctn
WX4027				

LED BOLLARD LIGHTS

LED lighting is perfect for outdoor use! Transform your garden into a beautiful illuminated piece of art with our LED lights.
They can be implemented in both domestic and commercial
applications. Our in ground up lights and strip lights will have your garden the envy of all.

The LED bollard lights are ideal for gardens, parks, walkways, restaurant outdoor spaces and more

Model No.	Dimension	Voltage
ST712	140x250mm	AC220-240V 50Hz
E27 Max 40W Class I		
Model No.	**Dimension**	**Voltage**
ST714-450	140x250x450mm	AC220-240V 50Hz
E27 Max 40W Class I		
Model No.	**Dimension**	**Voltage**
ST714-1000	140x250x1000mm	AC220-240V 50Hz
E27 Max 40W Class I		

Wall Pillar Light ST712

LED Bollard Light ST714-450

LED Bollard Light ST714-1000

UP/DOWN WALL PILLAR SPOT LIGHTS

DIMENSIONS

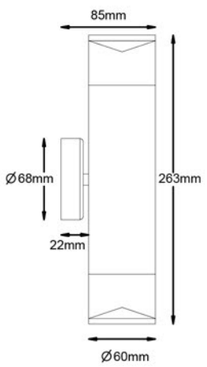

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5089 BLK	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Matt Black
ST5089 TTM	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Matt Silver

Lamp Holder 2*GU10, 35W MAX/2*MR16,20W MAX

DIMENSIONS



Model No.	Input Voltage	LED Source	Material	Finished Color
ST5161 BLK	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Matt black
ST5161 TTM	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Titanium

Lamp Holder 1*GU10, 35W MAX/1*MR16,20W MAX

DIMENSIONS



ST5163 BLK Matt black **ST5163 TTM Titanium**

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5163 BLK	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Matt black
ST5163 TTM	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Titanium

Lamp Holder 1*GU10, 35W MAX/1*MR16,20W MAX

DIMENSIONS

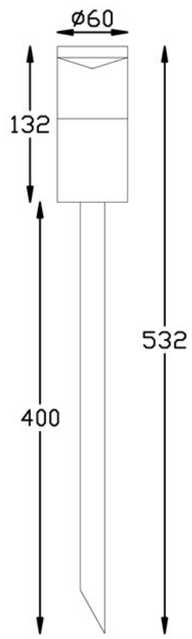

ST5090 BLK Matt black

ST5090 TTM Titanium

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5090 BLK	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Matt black
ST5090 TTM	AC220-240V, 50Hz/DC 12V	Excluding Bulbs	Aluminum Body	Titanium

Lamp Holder 1*GU10, 35W MAX/1*MR16,20W MAX

ST5023

ST5025

DIMENSIONS





PACKAGING(ST5025)

- Packaging 110*110*110mm
- Carton 20pcs/CTN
- Carton Size 570*235*240mm

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5023	AC220-240V, 50Hz	Excluding Bulbs	Aluminum Body	Matt Black/ Matt Silver

Lamp Holder 2*GU10, 35W MAX

Model No.	Input Voltage	Lumen	CCT	Beam Angle	CRI	Material	Fitting Colour	N.W	G.W
ST5025	AC220-240V 50/60Hz	360lm	3000K/4000K 6000K	0-120°	>80	Die-cat Aluminum	White/Black	13.5Kg	14.5Kg

ADJUSTABLE DOWN WALL LIGHT OUTDOOR LIGHTING FIXTURE

ST5021

DIMENSIONS

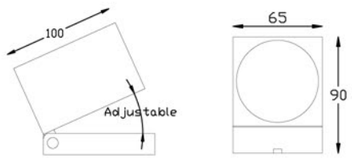

PRODUCT FEATURES

- This wall lamp published Outdoor Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

Model No.	Input Voltage	Adjustable Angle	LED Source	Material	Finished Color
ST5021	AC220-240V, 50Hz	0°-90° (Special)	Excluding Bulbs	Aluminum Body	Matt Black/Matt Silver
Lamp Holder	1*GU10, 35W MAX				

ALUMINIUM UP/DOWN WALL PILLAR SPOT LIGHTS

ST5022



PRODUCT FEATURES

- This wall lamp published Outdoor Up/Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5022	AC220-240V, 50Hz	Excluding Bulbs	Aluminum Body	Matt Black/Matt Silver
Lamp Holder	1*GU10, 35W MAX			

ALUMINIUM UP/DOWN WALL PILLAR SPOT LIGHTS

ST5024

DIMENSIONS



PRODUCT FEATURES

- This wall lamp published Outdoor Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5024	AC220-240V, 50Hz	Excluding Bulbs	Aluminum Body	Matt Black/Matt Silver
Lamp Holder	1*GU10, 35W MAX			

ALUMINIUM UP/DOWN WALL PILLAR SPOT LIGHTS

ST5025



PRODUCT FEATURES

- This wall lamp published Outdoor Up/Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

Model No.	Input Voltage	LED Source	Material	Finished Color
ST5025	AC220-240V, 50Hz	Excluding Bulbs	Aluminum Body	Matt Black/Matt Silver
Lamp Holder	2*GU10, 35W MAX			

3W LF-372046R

3W LF-372046S

DIMENSIONS





PRODUCT FEATURES

- This wall lamp published Outdoor Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

PACKAGING(3W LF-372046R)

- Packaging L160×W40×H160mm
- Carton 20pcs/CTN
- Carton Size L34×W34×H22cm

PRODUCT FEATURES

- This wall lamp published Outdoor Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

PACKAGING(3W LF-372046S)

- Packaging L160×W40×H160mm
- Carton 20pcs/CTN
- Carton Size L34×W34×H22cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Material	Fitting Colour	N.W	G.W
LF-372046R/3W	220-240V	3W	120lm	3000K/4000K 6000K	120°	>80	Aluminum +PC	White / Black	7.2Kg	9.4Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Material	Fitting Colour	N.W	G.W
LF-372046S/3W	220-240V	3W	115lm	3000K/4000K 6000K	120°	>80	Aluminum +PC	White / Black	9.2Kg	11.6Kg

4W LF-372033

6W LF-372033

DIMENSIONS





PRODUCT FEATURES

- This wall lamp published Outdoor Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

PACKAGING(4W)

- Packaging L125×W40×H100mm
- Carton 20pcs/CTN
- Carton Size L27×W22×H22cm

PRODUCT FEATURES

- This wall lamp published Outdoor Down Wall-mounted Fixtures in Matt Black coated aluminium.
- This wall lamp is suitable for front door, fence and outdoor walkways, etc.

PACKAGING(6W)

- Packaging L185×W40×H100mm
- Carton 20pcs/CTN
- Carton Size L39×W22×H22cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Material	Fitting Colour	N.W	G.W
LF-372033/4W	220-240V	4W	300lm	3000K/4000K 5500K	120°	>80	Die - cat Aluminum	White / Black	7.4Kg	9.0Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Material	Fitting Colour	N.W	G.W
LF-372033/6W	220-240V	6W	2×300lm	3000K/4000K 5500K	120°	>80	Die - cat Aluminum	White / Black	11.0Kg	12.8Kg

LED SENSOR LIGHT SERIES

LED sensor light
CREE COB LED
CREE laboratory tested product
CREE laboratory test report



P121
ES-B06B

LED SENSOR LIGHT SERIES

PRODUCT FEATURES

- 1600 LUMENS COOL WHITE BEAM
- ADJUSTABLE TIME & LUX MANUAL
- OVER-RIDE WEATHERPROOF
- Easy installation，three years warranty

PACKAGING(ES-B06B)

- Packaging L180*W135*H175mm
- Carton 20pcs/CTN
- Carton Size L69.5*W38*H37cm

ES-B06B

DIMENSIONS



Ambient Light	<10~2000LUX (adjustable)
Time-delay	min: 10sec±3sec max:7min±2min
Detection Distance	2~12m (<24℃)(adjustable)
Rated Load	2x10W PAR30 LED(included) (Max. 2x150W PAR38 Lamps)
Installation Height	1.8m~2.5m
Working Humidity	<93%RH
Detection Motion Speed	0.6~1.5m/s

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Working Temperature	Detection Range	N.W	G.W
ES-B06B	220-240V	20W	1600lm	5000K	120°	>80	Black	-20~+40℃	180°	12.8Kg	14Kg

PHOTOMETRIC DATA

5000K





AC4202

PRODUCT FEATURES

- CREE COB LED
- 2X15W 240VAC 50Hz
- Sensitivity adjustment: sensor with override function
- Setting time: 10±5 seconds to 4±1 minutes adjustable
- Colour available: black, silver, white and brushed chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4202	AC240V 50Hz	30W	2000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4202	AC240V 50Hz	30W	2080lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

PHOTOMETRIC DATA

LED SENSOR LIGHT SERIES

AC 4206 AC 4205 AC 4203

PRODUCT FEATURES

- CREE COB LED
- 15W 240VAC 50Hz
- Sensitivity adjustment: sensor with override function
- Setting time: 10±5 seconds to 4±1 minutes adjustable
- Colour available: black, silver, white and brushed chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4206	AC240V 50Hz	15W	1000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4206	AC240V 50Hz	15W	1040lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4205	AC240V 50Hz	30W	2000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4205	AC240V 50Hz	30W	2080lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4203	AC240V 50Hz	15W	1000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4203	AC240V 50Hz	15W	1040lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

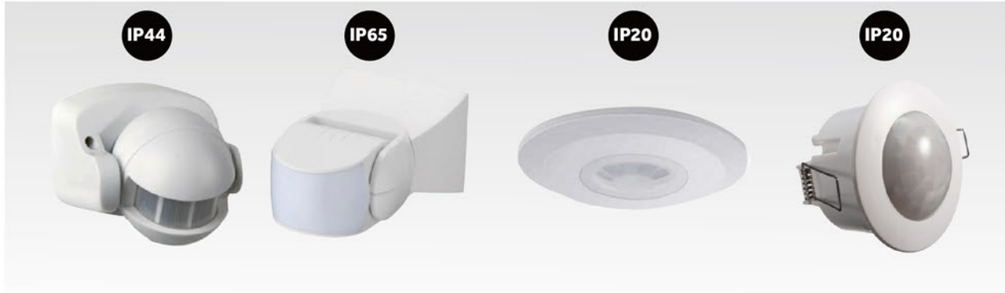

ST09 ST765 ST05C ST41C

PRODUCT FEATURES

- Surface mounted
- 3 Wires
- Suitable with LED
- Manual override

MOTION SENSORS ST09 - Infrared motion sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST09	220V-240V	Max.1200W	180°	1.8m-2.5m	0.6-1.5m/s	12m MAX （<24°C）

- Time Delay Min.10sec+ 3ec ; Max.7min + 2min
- Ambient Light <3-2000LUX (adjustable)

MOTION SENSORS ST765 - Microwave Sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST765	220V-240V	Max.1200W	180°	1.5-3.5m	0.6-1.5m/s	5-15m (adjustable)

- Time Delay Min.10sec+ 3ec ; Max.12min + 1min
- Ambient Light <3-2000LUX (adjustable)
- Power Consumption Approx.0.9W

MOTION SENSORS ST05C – Infrared motion sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST05C	220V-240V	Max.1200W	360°	2.2m-4.0m	0.6-1.5m/s	6m MAX （<24°C）

- Time Delay Min.10sec+ 3ec ; Max.15min + 2min
- Ambient Light <3-2000LUX (adjustable)

MOTION SENSORS ST41C - Infrared motion sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST41C	220V-240V	Max.1200W	360°	2.2-4.0m	0.6-1.5m/s	6m MAX （<24°C）

- Time Delay Min.10sec+ 3ec ; Max.15min + 2min
- Ambient Light <3-2000LUX (adjustable)

LED EMERGENCY LIGHT SERIES

Widely used in modern hotels,shops and other public places,security evacuation and guide.

P127
SP-2001

P129
SP-3002

SP-2001-WH

SP-2001-BK

DIMENSIONS





PRODUCT FEATURES

- SP-2001 is designed as a surface mount
- Emergency exit light allowing 2hours minimum
- 4pcs PVC stickers are included.
- SAA approved, AS/NZS2293.

• Battery	4.8V 1200mAh NI-MH
• Charge time	24hours
• Discharge time	3 hours
• Operating Temp	0°C~+40°C
• Materia	Flame retardant (V-0)
• Size	316*206*76mm
• Charging Power	3W
• PVC sticker	4pcs
• Light Source	2*16pcs LED(White)
• Classification	C0:D25 C90:25
• Side	Single/double
• Work mode	Maintain
• Indicator	Red-charging
• Protection	Over-charge / over-discharge
• Installation	Ceiling or wall mount
• Cable	No,only AU connectors
• Standard	AS/NZS 2293 IEC 60598-2-22

PRODUCT FEATURES

- SP-2001 is designed as a surface mount
- Emergency exit light allowing 2hours minimum lighting after power cut.
- 4pcs PVC stickers are included.
- Usage: widely used in modern hotels,shops and other public places, security evacuation and guide.

• Charge time	16hours
• Discharge time	2 hours
• Operating Temp	0°C~40°C
• Side	Single/double
• IP Grade	IP20
• Material of the Lamp	Flame retardant (V-0)
• Size of the Lamp	show as below
• PVC sticker	4pcs
• LED Power	3W
• Light Source	2*16pcs LED(White)
• Work mode	Maintain
• Installation	Ceiling or wall mount
• Indicator	Red-Charging
• cable	No,only AU connectors
• Protection	Over-charge / over-discharge
• Standard	AS/NZS 2293 IEC 60598-2-22

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	DC power
SP-2001-WH	220-240V	24M	Non-maintain	180 min	NI-MH 4.8V 1200MAH	1W
SP-2001-BK	220-240V	24M	Non-maintain	180 min	NI-MH 4.8V 1200MAH	1W

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	DC power
SP-2001-WH	220-240V	3W	maintain	120 min	NI-MH 4.8V 1200MAH	1W
SP-2001-BK	220-240V	3W	maintain	120 min	NI-MH 4.8V 1200MAH	1W

SP-2002-WH

SP-2003-WH

DIMENSIONS





PRODUCT FEATURES

- The SP-2002 is designed as a slim recessed mount emergency exit light
- allowing 2hours minimum lighting after power cut.
- 4pcs PVC stickers are included.
- SAA approved, AS/NZS2293.

• Charge time	24hours
• Discharge time	3 hours
• Operating Temp	0°C~+40°C
• Materia	Flame retardant (V-0)
• Size	363*217*H93mm
• Charging Power	3W
• PVC sticker	4pcs
• Light Source	16pcs LED(White)
• Classification	C0:D25 C90:25
• Side	Single/double
• Work mode	Maintain
• Indicator	Red-charging
• Protection	Over-charge / over-discharge
• Installation	Ceiling or wall mount
• Cable	Flex and AU plug
• Standard	AS/NZS 2293 IEC 60598-2-22

PRODUCT FEATURES

- SP-2003 is designed as a slim surface mount emergency exit light
- Emergency light allowing 2 hours minimum
- Lighting after mains failure.
- SAA approved, AS/NZS2293.

• Charge time	16hours
• Discharge time	2 hours
• Operating Temp	0°C~40°C
• Side	Single/double
• IP Grade	IP20
• Material of the Lamp	Flame retardant (V-0)
• Size of the Lamp	show as below
• PVC sticker	4pcs
• LED Power	3W
• Light Source	2*16pcs LED(White)
• Work mode	Maintain
• Installation	Ceiling or wall mount
• Indicator	Red-Charging
• cable	No,only AU connectors
• Protection	Over-charge / over-discharge
• Standard	AS/NZS 2293 IEC 60598-2-22

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	DC power
SP-2002-WH	220-240V	D25	Non-maintain	180 min	NI-MH 4.8V 800MAH	1W
SP-2002-BK	220-240V	D25	Non-maintain	180 min	NI-MH 4.8V 800MAH	1W

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	DC power
SP-2003-WH	220-240V	24M	maintain	180 min	NI-MH 4.8V 1800MAH	1W
SP-2003-BK	220-240V	24M	maintain	180 min	NI-MH 4.8V 1800MAH	1W

PRODUCT FEATURES

- SP-3002 is designed as a compact non-maintain
- Surface mount LED emergency light allowing 3 hours
- Minimum lighting after mains failure.

• Charge time	24hours
• Discharge time	3 hours
• Operating Temp	0°C~+40°C
• Materia	Retardant Plastic
• Size	214*214*H56mm
• Charging Power	3W
• DC power	1.7W
• Classification	C0:D25 C90:25
• Color	White
• Indicator	Red-charging
• Protection	Over-charge / over-discharge
• Mounting	Ceiling or wall mount
• Cable	No,only AU connectors
• Standard	AS/NZS 2293 IEC 60598-2-22

DIMENSIONS



SP-3002

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	Output lumen
SP-3002-WH	220-240V	D25	Non-maintain	180 min	NI-MH 4.8V 1800MAH	140 lm
SP-3002-BK	220-240V	D25	Non-maintain	180 min	NI-MH 4.8V 1800MAH	140 lm

SP-3001

SP-3001B

DIMENSIONS

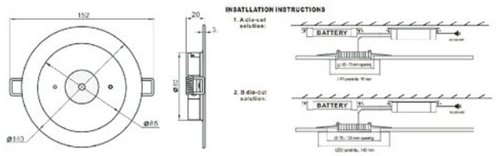

DIMENSIONS

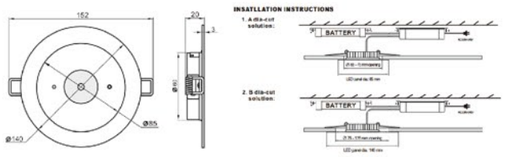

PRODUCT FEATURES

- SP-3001 is designed as a non-maintain recessed LED
- Emergency light allowing 3 hours minimum
- Lighting after mains failure.

• Charge time	24hours
• Discharge time	3 hours
• Operating Temp	0°C~+40°C
• Materia	Flame retardant (V-0)
• Size	Ø140*H20mm
• Charging Power	3W
• DC power	1.7W
• Emergency lumen	140lm
• Classification	C0:D25 C90:25
• Color	White
• Indicator	Red-charging
• Protection	Over-charge / over-discharge
• Mounting	Recessed
• Cable	With Flex and AU plug
• Standard	AS/NZS 2293 IEC 60598-2-22

PRODUCT FEATURES

- SP-3001 is designed as a non-maintain recessed LED emergency light allowing 2hours minimum lighting after mains failure.
- Usage: widely used in modern hotels,shops and other
- public places,security evacuation and guide.

• Charge time	16 hours
• Discharge time	2 hours
• Operating Temp	0°C~+40°C
• Material	Flame retardant (V-0)
• Size	show as below
• Charging Power	3W
• DC power	1.7W
• classification	C0:D25 C90:25
• Color	White
• Work mode	NON-maintain
• Indicator	red-charging
• Protection	Over-charge/over-discharge
• Mounting	Recessed
• cable	With Flex and AU plug
• Standard	AS/NZS 2293 IEC 60598-2-22

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	Output lumen
SP-3001-WH	220-240V	D25	Non-maintain	180 min	NI-MH 4.8V 1800MAH	140 lm
SP-3001-BK	220-240V	D25	Non-maintain	180 min	NI-MH 4.8V 1800MAH	140 lm

Model No.	Input	Classification	Operation	Discharging duration	Emergency mode battery	Output lumen	Charging mode	DC power
SP-3001-WH	220-240V	D25	Non-maintain	120min	NI-MH 4.8V 1800MAH	140 lm	3W	1.7W
SP-3001-BK	220-240V	D25	Non-maintain	120min	NI-MH 4.8V 1800MAH	140 lm	3W	1.7W

ACCESSORIES SERIES

Accessories include dimmer, energy saving lamps, GU10 halogen globe, T8 & T5 tubes, GU10 lamp holders & plug, LED drivers, ballasts ,etc.

P135
11W A60

P135
5W MR16

P136
PAR20-7W

PUSH BUTTON LED TRAILING DIMMER

PRODUCT FEATURES

- Soft start
- Overload protection& short circuit protection
- Easy to mount in most Australia plates
- Suitable for dimming dimmable LED globes, incandescent globes, high voltage halogen globes, electronic transformers with low voltage halogen globes
- No compattible dl 1640/1650
- Long press dimming button to dim
- Short press dimming button to on/off
- Comes with 2 face caps round & square edged to suit most Australia plates

Ambient temperature: 0 to 40 ℃
Operating humidity: 10% to 95% RH, no condensing
Storage temperature: 0 to 60℃
Storage humidity: 10% to 95% RH, no condensing

DIMENSIONS

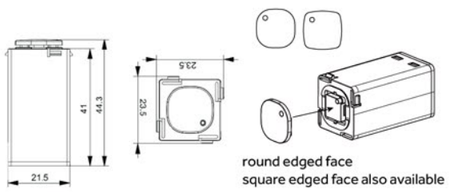

Input	Frequency	Rated Power	Size(W x L x H)
220-240V	AC 50Hz	5-350VA	23.5x23.5x44.3mm

Applying 3KVrms voltage between the surface if the button of the unit against its opening ends of two fly wires which are electrically connected together, the unit will not have trigger current higher than 1mA during the 1 minutes test duration

This product can only be operated at less than 2000 meters above to sea level
Min.20,000cycles

PRODUCT FEATURES

- Soft start
- Overload protection& short circuit protection
- Easy to mount in most Australia plates
- Suitable for dimming dimmable LED globes, incandescent globes, high voltage halogen globes, electronic transformers with low voltage halogen globes
- Rotating to turn on/off
- Comes with dimming knob suit most Australia plates

- Compatible loads with dimmable led lighting, maximun load 150w, mininum load 10w.
- Compatible loads with incandescent lighting 240V halogen lamps, maximun load 400w, mininum load 10w.
- Compatible loads with low voltage halogen lighting with electronic transformers, maximun load 400VA, mininum load 10VA
- Compatible with all 3A downlight

Ambient temperature: 0 to 40 ℃
Operating humidity: 10% to 95% RH, no condensing
Storage temperature: 0 to 60℃
Storage humidity: 10% to 95% RH, no condensing

DIMENSIONS



Input	Frequency	Rated Power	Size(W x L x H)
220-240V	AC 50Hz	10-400VA	23x23x55mm

Controller Dimming/CTA/RGB/RGBW Controller

Controller Type	Dimming/CTA/RGB/RGBW
Working Frequency	2.4GHz
Input Voltage	12-24VDC
Current	3AX4CH
Power	12V<144W.24V<288W
Output type	PWM
Size	L114*W38*H20mm
Weight(N.W.)	53g

VP

Amplifier Dimming/CTA/RGB/RGBW Amplifier

Input Voltage	5-36VDC
Input Signal	PWM, 4 chanels(commonanode)
Output type	PWM
Current	5AX4CH
Power	12V<240W, 24V<480W
Size	L170*W50*H23
Weight(N.W.)	53g

EV4

11W A60

5W MR16

PRODUCT FEATURES

- Low energy consumption
- Low maintenance cost
- Low themal uutput
- Shockproof and vibration proof
- Not suitable for dimmers
- Replace incandscent lamp A60

PACKAGING

- Packaging L60*W60*H115mm
- Carton 100pcs/CTN
- Carton Size L65*W33*H25cm



PRODUCT FEATURES

- High lumen output LED.
- DC12V, 50Hz, 5W.
- 38° beam angle.
- Built-in LED driver

PACKAGING

- Packaging L52*W52*H58mm
- Carton 100pcs/CTN
- Carton Size L54.5*W28*H13.5cm



Model No.	Input	Power	Lumen	CCT	CRI	Dimmable	Fitting Colour	N.W	G.W
A60-11W	200-240V	11W	1050lm	3000K/4000K/6500K	>80	No	White	5.0Kg	5.9Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
MR16-5W	DC12V	5W	400lm	3000K/4000K/5700K	38°	>80	No	White	2.8Kg	3.8Kg

PHOTOMETRIC DATA

11W A60

3000K



4000K



6500K



5W MR16

3000K



4000K



5700K



PUSH BUTTON LED TRAILING DIMMER

PAR20-7W

PAR38-15W

DIMENSIONS





PRODUCT FEATURES

- 240V, 50/60Hz, 7W
- High lumen output LED
- 38° beam angle
- Built-in LED driver
- IP65 waterproof

PACKAGING(PAR20-7W)

- Packaging L65*W65*H90mm
- Carton 50pcs/CTN
- Carton Size L33*W33*H19cm
- Base E27/B22

PACKAGING(PAR38-15W)

- Packaging L125*W125*H130mm
- Carton 20pcs/CTN
- Carton Size L65*W26.5*H31cm
- Base E27/B22

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
PAR20-7W	200 -240V	7W	650lm	3000K/4000K/5500K	38°	>80	No	White	4.5Kg	5.5Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
PAR38-15W	200 -240V	15W	1350lm	3000K/4000K/5500K	38°	>80	No	White	7.0Kg	8.0Kg

PHOTOMETRIC DATA

3000K



4000K



5500K



GU10 LAMP HOLDERS&PLUG&SOCKET

GU10 LAMP HOLER

GU10LP

PL02

2 pin plug
1.2M flex and plug;

Downlight Socket

PL03

3 pin plug
1.2M flex and plug;

LED DRIVERS

3A DRIVER

12V 36W LED DRIVER
AC ADATER
Input: 100-240V
Output: 12V DC 3A

6A DRIVER

12V 72W LED DRIVER
AC ADATER
Input: AC100-240V 60Hz
Output: 12V DC 6A

LED TRACK LIGHT 3 WIRES ADAPTER



Track

Code	3T
Voltage	AC200-240V,50/60Hz
Current	10A
Load Bearing	10KG/M
Length	1M/1.5M/2M/3M
Color	White/Black



End Feed

Code	3EF
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



Straight Connector Mini

Code	3SCM
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



Middle Feed

Code	3MF
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



L-Feed-L

Code	3LFL
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



L-Feed-R

Code	3LFR
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



T-Feed-L1

Code	3TFL1
Voltage	AC200-240V,50/60Hz
Current	10A
Load Bearing	10KG/M
Length	1M/1.5M/2M/3M
Color	White/Black



T- Feed-L2

Code	3TFL2
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



T- Feed-R1

Code	3TFR1
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



T- Feed-R2

Code	3TFR2
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



X- Feed

Code	3XF
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black



End Cap

Code	3EC
Voltage	AC200-240V,50/60Hz
Current	10A
Color	White/Black

LED TRACK LIGHT

Adjustable LED track light with aluminum body in powder -coated,excellent aluminum heat sink and ultra tempered clear glass,equipped with anti-glare optical reflector.



P142
TH15LED



P150
MN-TR55M

P151
MN-DL55M

P152
MN-EX55M

Life Time >35,000h

PRODUCT FEATURES

- CRI>80Ra
- PFC>0.9;
- High efficiency LED CREE chip
- Replacement 75W halogen
- Super bright high lumen output
- Size: Ø62mm; L95mm; H140mm
- 3 wires adapter
- Dimmable

DIMENSIONS



Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
TH15LED/BLK/WW	240V 50/60Hz	15W	800lm	3000K	60°	>80	Yes	Black
TH15LED/BLK/DL	240V 50/60Hz	15W	850lm	5000K	60°	>80	Yes	Black
TH15LED/WH/WW	240V 50/60Hz	15W	800lm	3000K	60°	>80	Yes	White
TH15LED/WH/DL	240V 50/60Hz	15W	850lm	5000K	60°	>80	Yes	White

Make sure power is disconnected before mounting the LED device.
Do not mount in enclosed fixtures exposed to wet conditions.
Make sure not to block the cooling grid of the device. Misuse will void the warranty.

GD-026-0637

FLICKER FREE LED TRACK LIGHT

Flicker free design, Tick-Lock adopted inside the track arm, triac dimmable internal driver.

Flicker-free is aiming to creates healthy lighting environment that make people enjoy photograph in any commercial occasions. Low UGR meanwhile offers high visual comfort. Appropriate friction and from mechanical Tick-Lock track arm design help to set up precise location and get rid of bad arm loose experience. Optics change is without any tools.

Matt White

PRODUCT FEATURES

- 3 phases adjustable LED track light
- High output reflector to maximise light
- Excellent aluminum heat sink
- Ultra tempered clear glass
- With anti-glare optical reflector
- V90°, H350°

PACKAGING

- Carton 24pcs/CTN
- Carton Size L33*W44*H56mm

DIMENSIONS

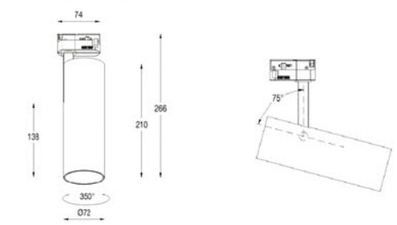

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
GD-026-0637	220 -240V	28W	2940lm	3000K	15°/24°/40°/60°	>90	Yes	Black/White	22Kg	23Kg

Luminance uniformity : ≥0.9

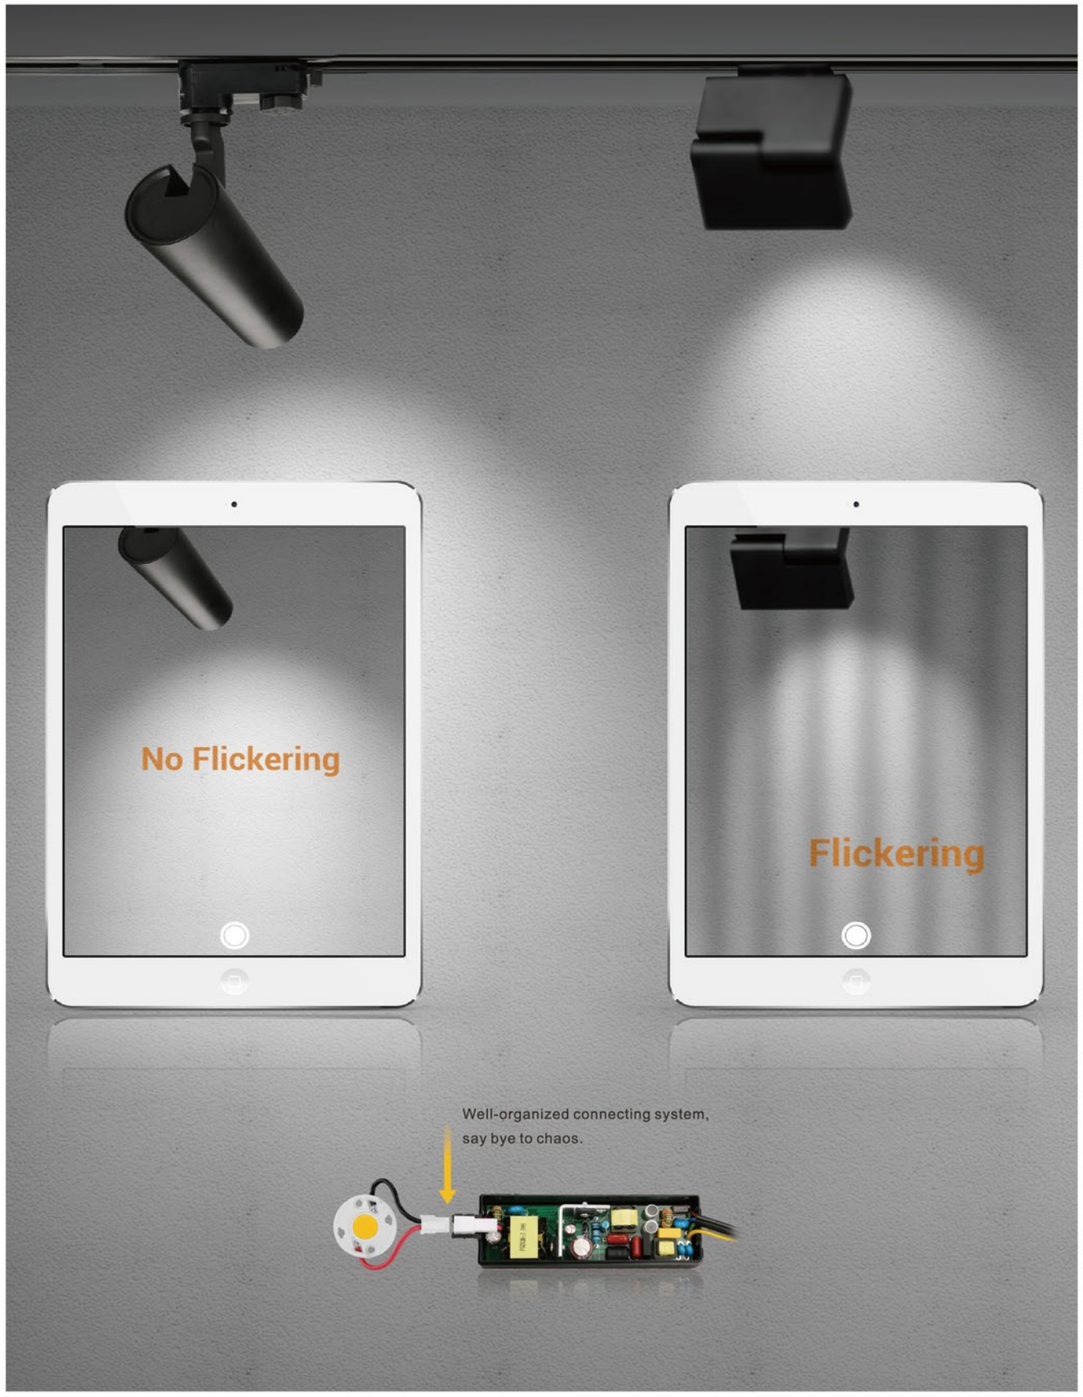

TH26LED-20W

TH26LED-25W

PRODUCT FEATURES

- Flicker free design
- Tick-Lock adopted inside the track arm
- Triac dimmable internal driver
- Tick mark on the track arm states precise directions for users
- Two-stage driver solution , THD＜10 , PF＞0.95 , UGR＜19
- Uses die-casting aluminum in heatsink
- Anti-glare rings is optional in white,black and golden
- 2 optics including reflector and lens
- Track System ： 3 wire /4wire
- PF value:＞0.95

DIMENSIONS



PACKAGING(20W/25W)

- Packaging L100*W85*H287mm
- Carton 15pcs/CTN
- Carton Size L44*W34.5*H31cm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
TH26LED/WH/WW	220 -240V	20W	Lens:1775lm Reflector:1420lm	3000K	60°	>80/90	Yes	White	11Kg	12Kg
TH26LED/WH/NW	220 -240V	20W	Lens:1775lm Reflector:1420lm	4000K	60°	>80/90	Yes	White	11Kg	12Kg
TH26LED/BLK/WW	220 -240V	20W	Lens:1775lm Reflector:1420lm	3000K	60°	>80/90	Yes	Black	11Kg	12Kg
TH26LED/BLK/NW	220 -240V	20W	Lens:1775lm Reflector:1420lm	4000K	60°	>80/90	Yes	Black	11Kg	12Kg

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
TH26LED/WH/WW	220 -240V	25W	Lens:2180lm Reflector:1780lm	3000K	60°	>80/90	Yes	White	11Kg	12Kg
TH26LED/WH/NW	220 -240V	25W	Lens:2320lmlm Reflector:1760lm	4000K	60°	>80/90	Yes	White	11Kg	12Kg
TH26LED/BLK/WW	220 -240V	25W	Lens:2180lmlm Reflector:1780lm	3000K	60°	>80/90	Yes	Black	11Kg	12Kg
TH26LED/BLK/NW	220 -240V	25W	Lens:2320lmlm Reflector:1760lm	4000K	60°	>80/90	Yes	Black	11Kg	12Kg

DIMENSIONS

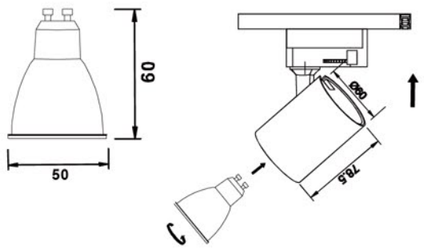

TH 16-GU10

PACKAGING

- Packaging 8×6.5×13cm
- Carton 50pcs/CTN
- Carton Size L42.5*W27.5*H35cm

- Material: Die-cat Aluminum

Model No.	Input	Fitting Colour	N.W	G.W
TH 16-GU10	AC220 -240V	White / Black	14.6Kg	15.6Kg

30000Hours

DIMENSIONS



TH 17-12W(Adjustable)

- Material Die-cat Aluminum

PACKAGING

- Packaging 90x65x180mm
- Carton 30pcs/CTN
- Carton Size 475x375x220mm

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour	N.W	G.W
TH17/WH/WW	AC220 -240V	9W	1050LM	3000K	36°	>80	Yes	White	15Kg	17Kg
TH17/WH/NW	AC220 -240V	9W	1080LM	4000K	36°	>80	Yes	White	15Kg	17Kg
TH17/BK/WW	AC220 -240V	9W	1050LM	3000K	36°	>80	Yes	Black	15Kg	17Kg
TH17/BK/NW	AC220 -240V	9W	1080LM	4000K	36°	>80	Yes	Black	15Kg	17Kg

BJ-TR60A-C(Adjustable) LED Philips 30000Hours

DIMENSIONS

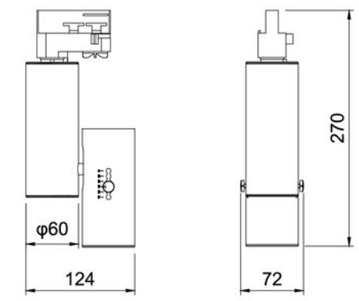

Adjustable: 90 °

BJ-TR60A-C

PACKAGING

- Packaging L295*W150*H85mm
- Carton 16pcs/CTN
- Carton Size L630*W310*H370mm

- Material: Aluminum

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	N.W	G.W
BJ-TR60A-C	AC220 -240V	10W	900lm/930lm/945lm	3000K/4000K/5000K	15-70°	>80	Yes	14.4Kg	17.6Kg
BJ-TR60A-C	AC220 -240V	15W	1425lm/1500lm/1515lm	3000K/4000K/5000K	15-70°	>80	Yes	14.4Kg	17.6Kg
BJ-TR60A-C	AC220 -240V	20W	2000lm/2080lm/2100lm	3000K/4000K/5000K	15-70°	>80	Yes	14.4Kg	17.6Kg

DIY

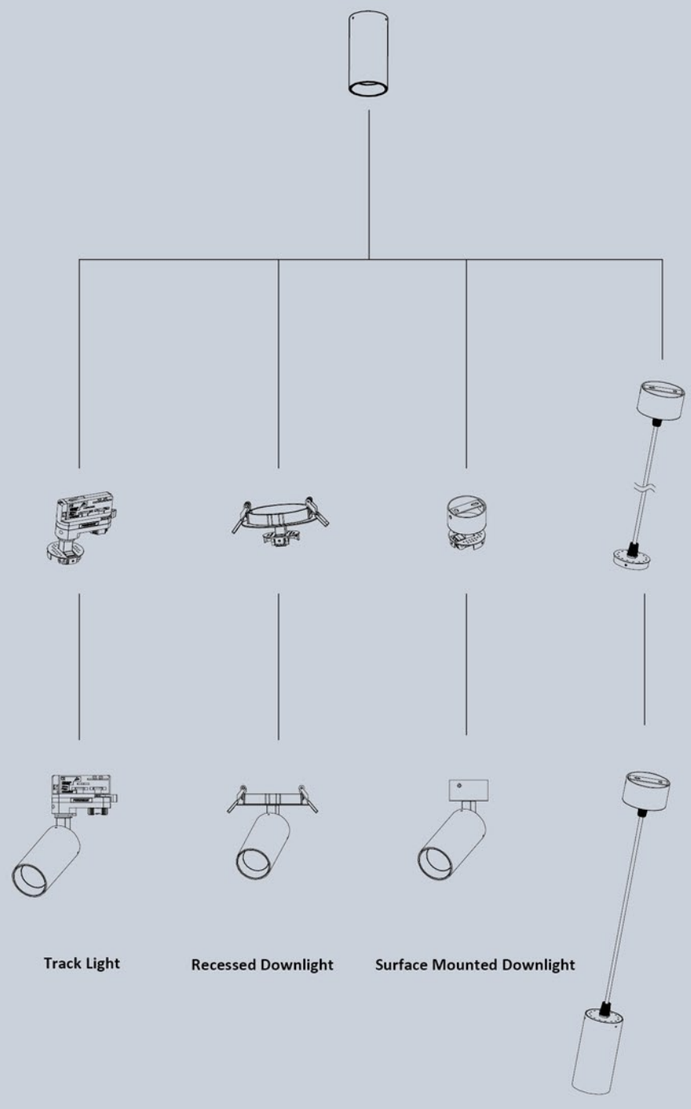

1.DIY family series: LED recessed downlight,LED Surface Mounted Downlight and LED Track Light. are can DIY by the LED spotlight .
2.Change the beam angle 15°/23°/38°/45°/60°.
3. High CRI>90
4. New structure with compact and portable design.
5.Widely used in hotels, restaurants, shops, offices, supermarkets, museums and residential lighting and so on.

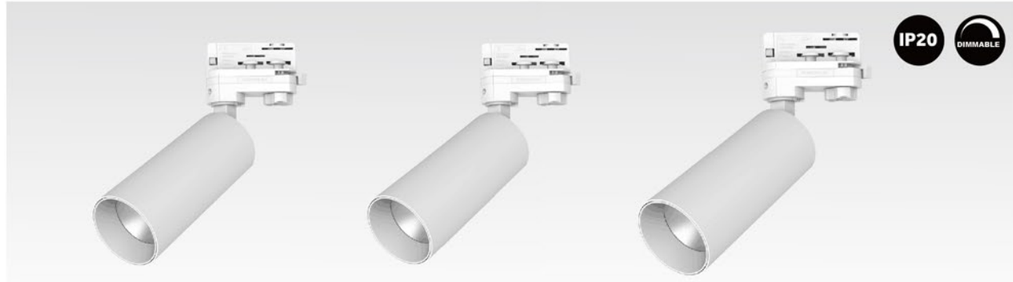

MN-TR55M-C09W MN-TR63M-C18W MN-TR75M-C30W

Life span 30000Hours

DIMENSIONS



Ø55×H185mm



Ø63×H213mm



Ø75×H233mm

PACKAGING(MN-TR55M-C09W)

- Packaging 105*105*208
- Carton 1PCS/Box 50pcs/Carton
- Carton Size 540*540*440

PACKAGING(MN-TR63M-C18W)

- Packaging 105*105*243
- Carton 1PCS/Box 30pcs/Carton
- Carton Size 645*540*268

PACKAGING(MN-TR75M-C30W)

- Packaging 105*105*265
- Carton 1PCS/Box 20pcs/Carton
- Carton Size 540*435*290

- Material Aluminum
- Led chip Luminus

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
MN-TR55M-C09W	220 -240V	9W	780lm/850lm/820lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-TR63M-C18W	220 -240V	18W	1550lm/1630lm/1590lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-TR75M-C30W	220 -240V	30W	2500lm/2585lm/2540lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery

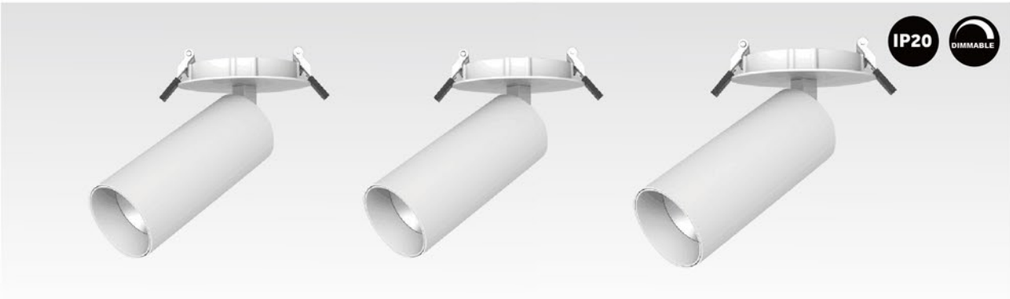

MN-DL55M-C09W MN-DL63M-C18W MN-DL75M-C30W

Life span 30000Hours

DIMENSIONS

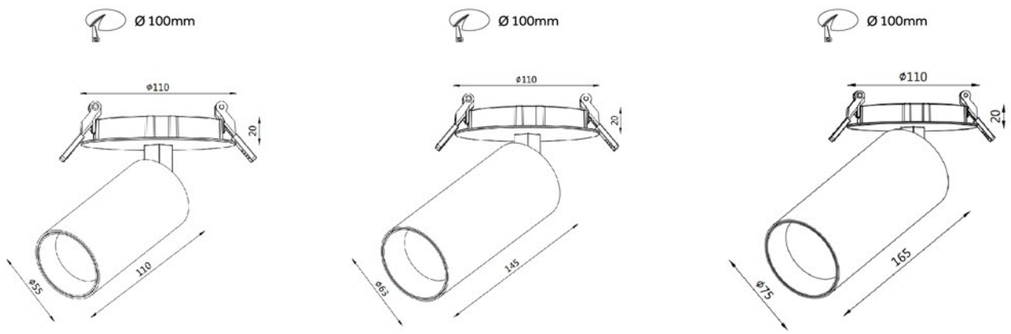

Ø55×H160mm Ø63×H195mm Ø75×H215mm

PACKAGING(MN-DL55M-C09W)

- Packaging 120*120*182
- Carton 1PCS/Box 32pcs/Carton
- Carton Size 495*495*390

PACKAGING(MN-DL63M-C18W)

- Packaging 120*120*217
- Carton 1PCS/Box 24pcs/Carton
- Carton Size 495*375*460

PACKAGING(MN-DL75M-C30W)

- Packaging 120*120*237
- Carton 1PCS/Box 18pcs/Carton
- Carton Size 375*375*500

- Material Aluminum
- Led chip Luminus

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
MN-DL55M-C09W	220 -240V	9W	780lm/850lm/820lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-DL63M-C18W	220 -240V	18W	1550lm/1630lm/1590lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-DL75M-C30W	220 -240V	30W	2500lm/2585lm/2540lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery

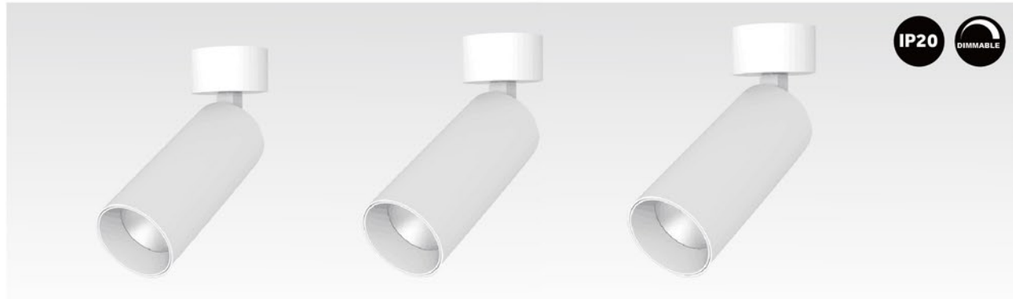

MN-EX55M-C09W MN-EX63M-C18W MN-EX75M-C30W

Life span 30000Hours

DIMENSIONS

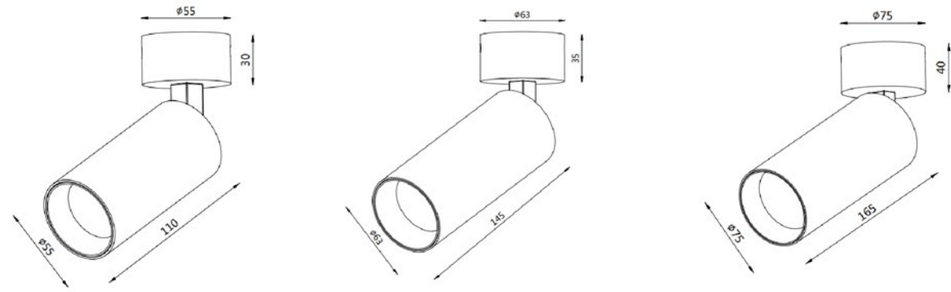

Ø55×H158mm Ø63×H198mm Ø75×H223mm

PACKAGING(MN-EX55M-C09W)

- Packaging 105*105*188.5
- Carton 1PCS/Box 40pcs/Carton
- Carton Size 540*435*402

PACKAGING(MN-EX63M-C18W)

- Packaging 105*105*228.5
- Carton 1PCS/Box 25pcs/Carton
- Carton Size 540*540*254

PACKAGING(MN-EX75M-C30W)

- Packaging 105*105*253.5
- Carton 1PCS/Box 20pcs/Carton
- Carton Size 540*435*278

- Material Aluminum
- Led chip Luminus

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
MN-EX55M-C09W	220 -240V	9W	780lm/850lm/820lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-EX63M-C18W	220 -240V	18W	1550lm/1630lm/1590lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-EX75M-C30W	220 -240V	30W	2500lm/2585lm/2540lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery

DIMENSIONS

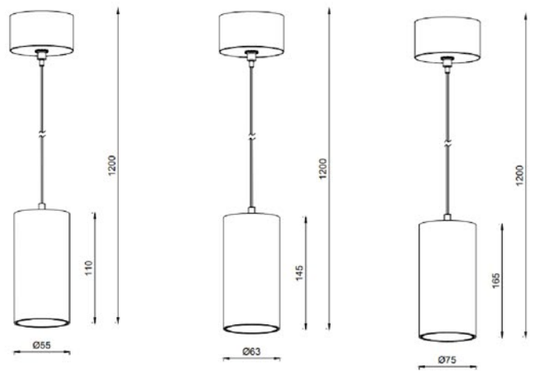

MN-SL55M-C09W MN-SL63M-C18W MN-SL75M-C30W

PACKAGING(MN-SL55M-C09W)

- **Packaging** 140*140*90
- **Carton** 1PCS/Box 48pcs/Carton
- **Carton Size** 575*575*295

PACKAGING(MN-SL63M-C18W)

- **Packaging** 180*150*90
- **Carton** 1PCS/Box 27pcs/Carton
- **Carton Size** 555*465*295

PACKAGING(MN-SL75M-C30W)

- **Packaging** 200*160*100
- **Carton** 1PCS/Box 18pcs/Carton
- **Carton Size** 495*415*325

SAA **Life span 30000Hours**

- **Material** Aluminum
- **Led chip** Luminus

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
MN-SL55M-C09W	220 -240V	9W	780lm/850lm/820lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-SL63M-C18W	220 -240V	18W	1550lm/1630lm/1590lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery
MN-SL75M-C30W	220 -240V	30W	2500lm/2585lm/2540lm	3000K/4000K/5700K	15°/23°/38°/45°/60°	≥80	Yes	White/Black/Silvery